


APP CRS	Rwy Ldg	8566
071°	TDZE	119
	Apt Elev	128


RNAV (RNP) Z RWY 6L
LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 6000.	MALSR	MISSED APPROACH: Climb to 3000 on track 071° to ZANAV and on track 042° to AMTRA and hold.
---	------------------------------	---

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

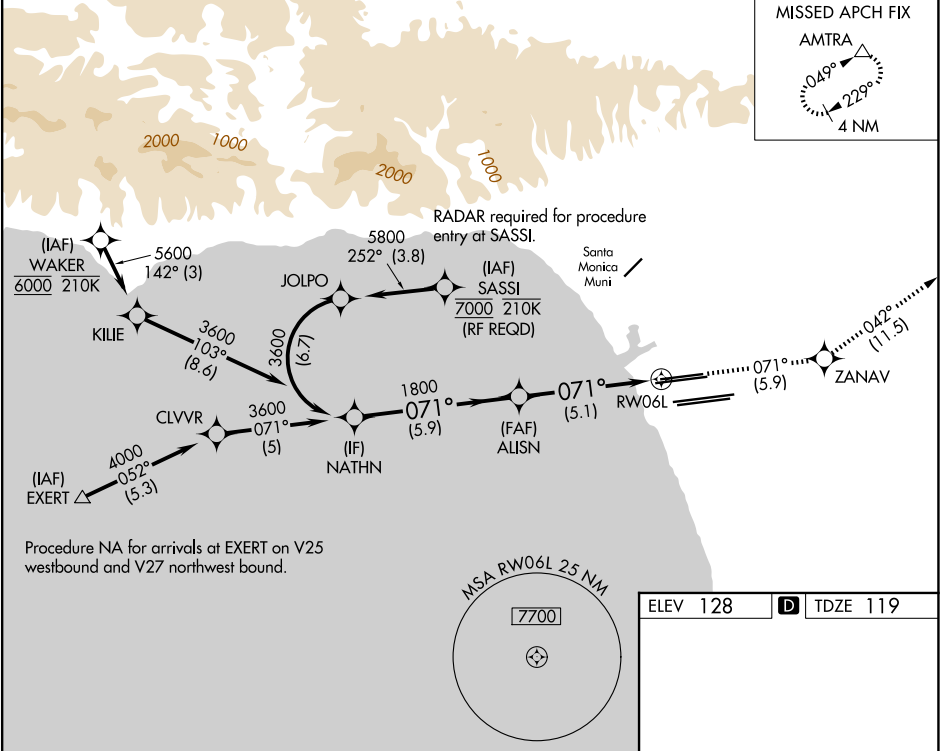

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 77).				3000	ZANAV	AMTRA
NATHN				↑ tr 071°		tr 042°
3600				1800	RW06L	
GP 3.00° TCH 55						
5.9 NM				5.1 NM		
CATEGORY	A	B	C	D		
RNP 0.30 DA	484/40					365 (400-¾)
AUTHORIZATION REQUIRED						

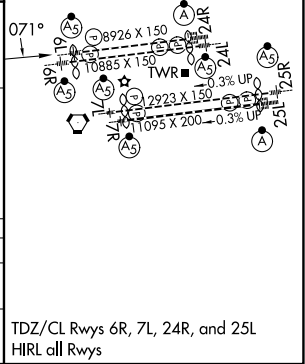

SW-3, 06 AUG 2026 to 03 SEP 2026

SW-3, 06 AUG 2026 to 03 SEP 2026