

WAAS
CH **45528**
W26A

APP CRS
264°

Rwy Ldg
TDZE
Apt Elev
8003
3256
3282

RNAV (GPS) RWY 26

LUBBOCK PRESTON SMITH INTL (LBB)

RNP APCH.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 52°C.
▲ For inop ALS, increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV Cat E visibility to RVR 5000; and increase LNAV Cat C/D/E visibilities to RVR 4500.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 5200 direct KAPWU and hold.

ATIS
125.3 270.275

LUBBOCK APP CON
119.2 351.8

LUBBOCK TOWER
120.5 239.3

GND CON
121.9 348.6

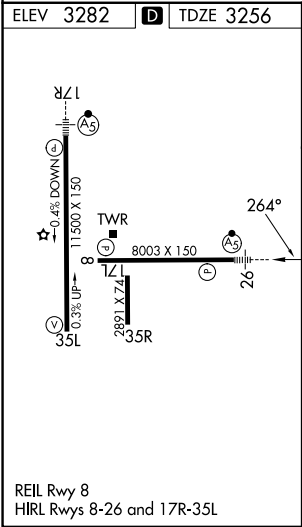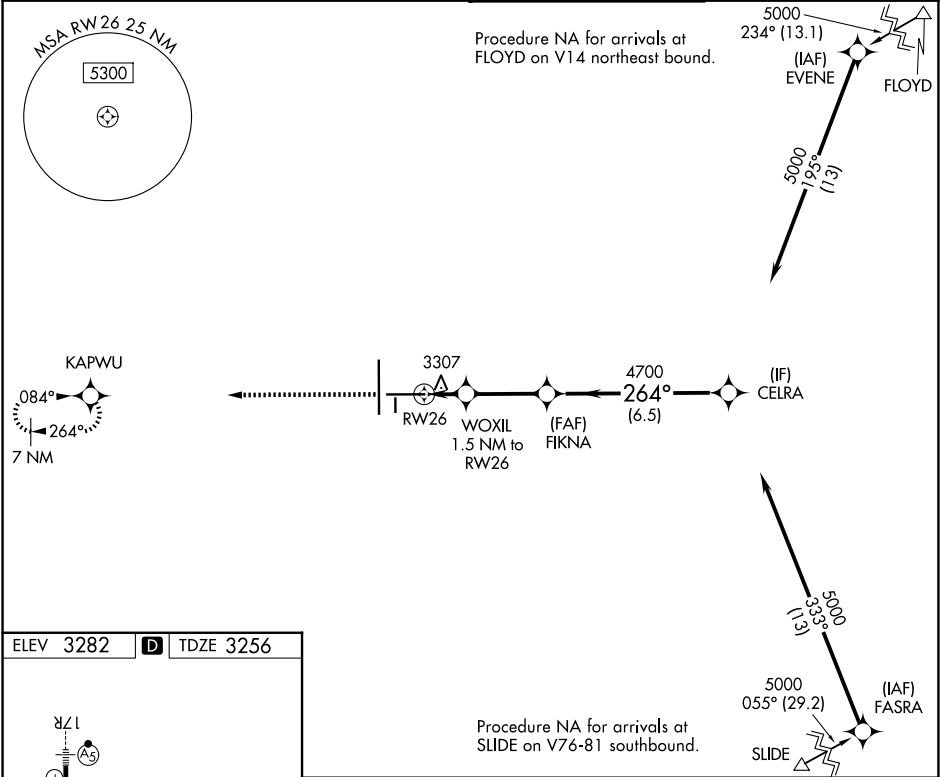

5200 ↑ KAPWU		WOXIL 1.5 NM to RW26		FIKNA 4700	CELRA 5000	GP 3.00° TCH 50	
*LNAV only.		*0.8 NM to RW26		*3780			
0.8 NM		0.7 NM		2.9 NM		6.5 NM	
CATEGORY	A	B	C	D	E		
LPV DA**	3456/24		200 (200-½)				
LNAV/ VNAV	DA		3579/26		323 (300-½)		
LNAV MDA	3560/24		304 (300-½)				
CIRCLING	3720-1	3740-1	3880-1½	3940-2	4100-3		
	438 (500-1)	458 (500-1)	598 (600-1½)	658 (700-2)	818 (900-3)		

SC-2, 06 AUG 2026 to 03 SEP 2026

SC-2, 06 AUG 2026 to 03 SEP 2026