

LOC/DME I-RRU	APP CRS	Rwy Ldg	8175
111.3	269°	TDZE	862
Chan 50		Apt Elev	869

ILS or LOC RWY 27

THE EASTERN IOWA (CID)

⚠ VDP NA with Iowa City altimeter setting. Autopilot coupled approach NA below 1910.


⚠ When local altimeter setting not received, use Iowa City altimeter setting: increase DA to 1126 feet; increase all MDA 80 feet, increase S-LOC Cat C and D visibility to RVR 5000, and Circling Cat C and D visibility ¼ SM.

#RVR 1800 authorized with use of FD or HUD to DA (NA when using Iowa City altimeter setting).


MALSR

MISSED APPROACH: Climb to 2900 direct CID VOR/DME and hold, continue climb-in-hold to 2900.

ATIS 124.15	CEDAR RAPIDS APP CON ★ 119.7 266.8	CEDAR RAPIDS TOWER ★ 118.7 (CTAF) 0 266.8	GND CON 121.6	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

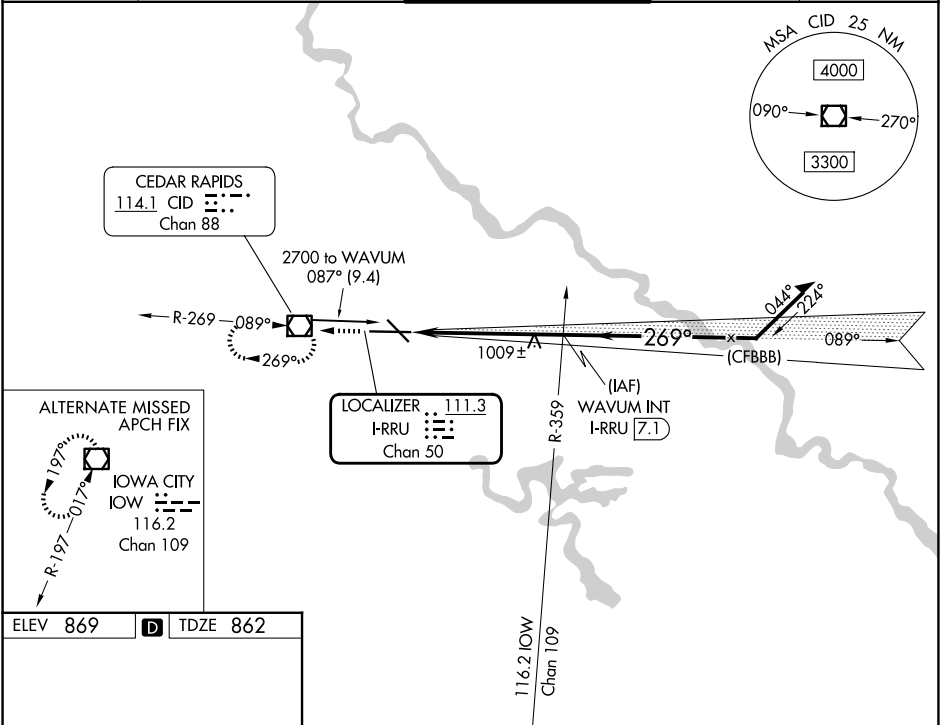

ELEV 869	D	TDZE 862
----------	----------	----------

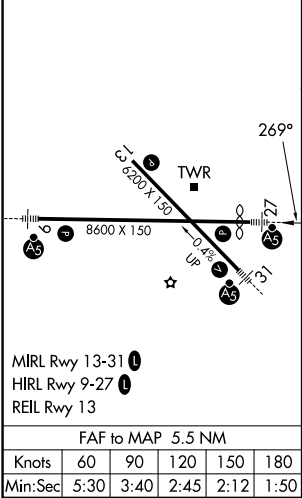

2900	CID	WAVUM INT I-RRU 7.1	Remain within 10 NM	
↑				
*LOC only				
	I-RRU 1.6	I-RRU 2.7		
	1.1 NM	4.4 NM		
		2700	2700	
		089°	269°	
			GS 3.00° TCH 49	
CATEGORY	A	B	C	D
S-ILS 27#	1062/24 200 (200-½)			
S-LOC 27	1260/24 398 (400-½)		1260/35 398 (400-⅝)	
CIRCLING	1280-1 411 (500-1)	1320-1 451 (500-1)	1560-2 691 (700-2)	1560-2¼ 691 (700-2¼)

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026