

WAAS CH 86201 W13A	APP CRS 134°	Rwy Ldg TDZE 869 Apt Elev 869
--	------------------------	---

RNAV (GPS) RWY 13




THE EASTERN IOWA (CID)

RNP APCH - GPS.

When local altimeter setting not received, use IOW altimeter setting: increase LPV DA to 1189 feet; increase LNAV/VNAV DA to 1269 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM and LNAV visibility Cat D ½ SM. Baro-VNAV and VDP NA when using IOW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 3000 direct
MORSE and hold.

ATIS 124.15	CEDAR RAPIDS APP CON * 119.7 266.8	CEDAR RAPIDS TOWER * 118.7 (CTAF) 0 266.8	GND CON 121.6	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

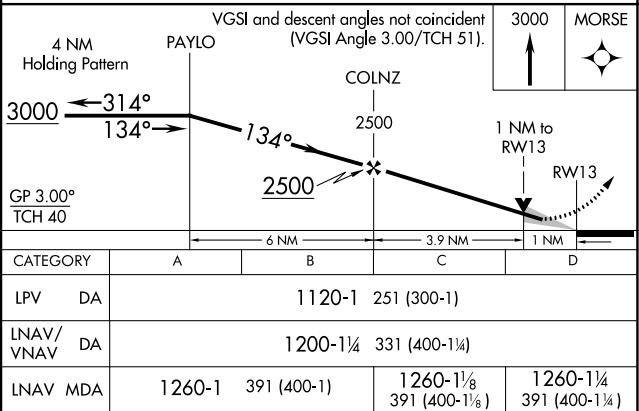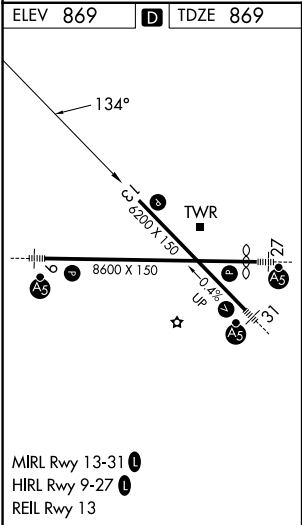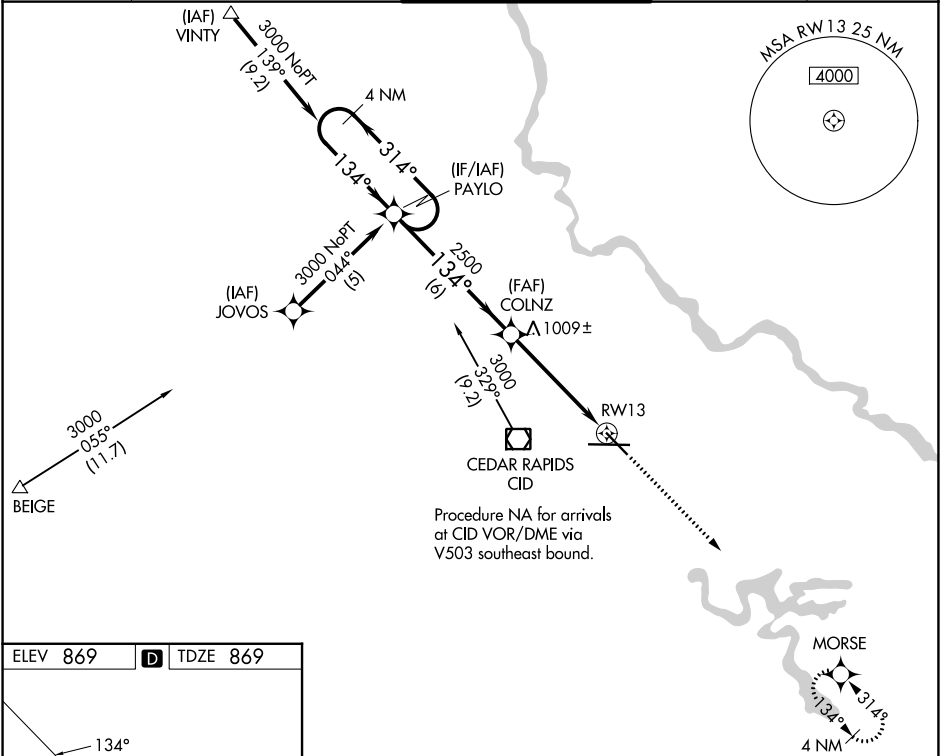

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026