

LOC/DME I-EXS 111.15 Chan 48(Y)	APP CRS 180°	Rwy Ldg TDZE Apt Elev	9000 301 341
---	------------------------	-----------------------------	---


ILS or LOC RWY 18L
FREDERICK W SMITH INTL/MEMPHIS (MEM)

Simultaneous approach authorized. DME or RADAR required.
For inop ALS, increase S-ILS 18L Cat E visibility to RVR 4000,
S-LOC 18L Cat E visibility to 1 3/4 SM, BRYSN fix minimums,
increase S-LOC 18L Cats D and E visibility to RVR 5000.

MALSR
AS

MISSED APPROACH: Climb to 900 then
climbing left turn to 5000 on MEM VORTAC
R-151 to KEEZE INT/MEM 10.4 DME and
hold, continue climb-in-hold to 5000.

MEMPHIS APP CON 119.1 291.6 (176°-355°) 125.8 338.3 (356°-175°)	MEMPHIS TOWER (Rwy 9-27) 118.3 257.8 (Rwys 18C-36C, 18L-36R) 119.7 257.8 (Rwy 18R-36L) 128.425 257.8	GND CON (Rwy 9-27) 121.0 379.2 (Rwys 18C-36C, 18L-36R) 121.9 379.2 (Rwy 18R-36L) 121.65 379.2
---	--	---

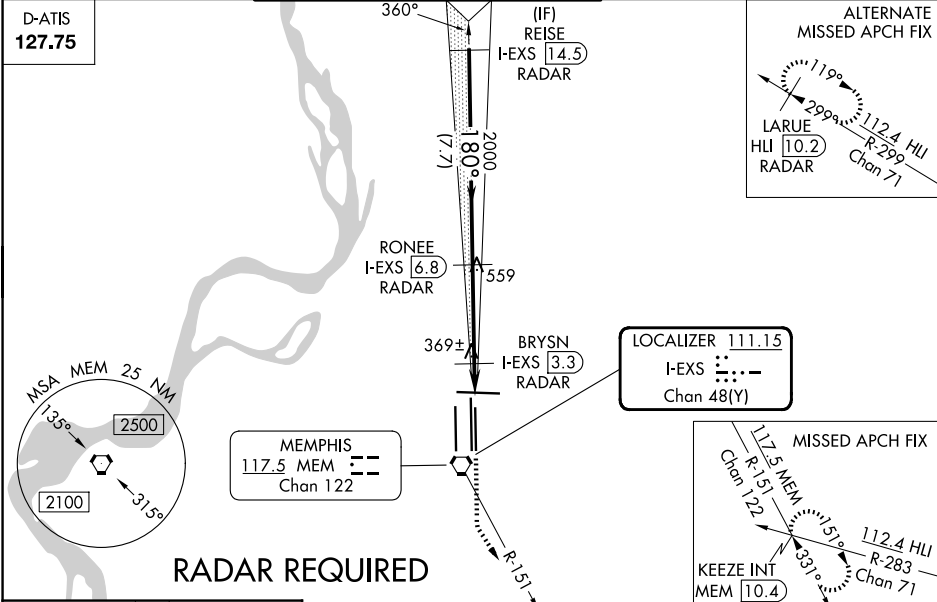

RADAR REQUIRED

