


WAAS CH 56606 W18A	APP CRS 180°	Rwy Ldg TDZE Apt Elev	9320 295 341
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 18R
FREDERICK W SMITH INTL/MEMPHIS (MEM)

RNP APCH - GPS		MALSR	MISSED APPROACH:
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.			Climb to 900 then climbing right turn to 5000 direct JEPOB and hold.
MEMPHIS APP CON		MEMPHIS TOWER	GND CON
119.1 291.6 (176°-355°)		(Rwy 9-27) 118.3 257.8	(Rwy 9-27) 121.0 379.2
125.8 338.3 (356°-175°)		(Rwys 18C-36C, 18L-36R) 119.7 257.8	(Rwys 18C-36C, 18L-36R) 121.9 379.2
		(Rwy 18R-36L) 128.425 257.8	(Rwy 18R-36L) 121.65 379.2

D-ATIS
127.75

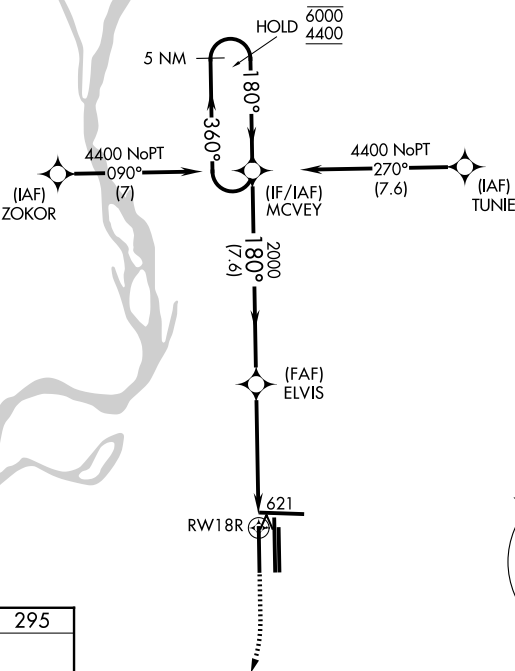

ELEV 341	D	TDZE 295
TDZL/RCLS Rwys 18L, 18C, 18R, 36R, 36C, and 36L HIRL all rwys		

900 ↑		5000 ↗		JEPOB △		5 NM Holding Pattern	

SE-1, 06 AUG 2026 to 03 SEP 2026

SE-1, 06 AUG 2026 to 03 SEP 2026