

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>86500</b><br><b>W01A</b> | APP CRS<br><b>011°</b> | Rwy Ldg<br>TDZE <b>289</b><br>Apt Elev <b>298</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 1

KEY FLD (MEI)

⚠


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwy 1 and 22. DME/DME RNP-0.3 NA.  
When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet, LPV all Cts visibility to RVR 3100, LNAV/VNAV all Cts and LNAV Cts C, D, and E visibilities to 1½ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inop MALSR increase LPV Cat E to RVR 4000, LNAV/VNAV Cat E visibility to RVR 6000, and LNAV Cat E visibility to 1½ mile. For inop MALSR when using Hattiesburg/Laurel Rgnl altimeter setting, increase LPV all Cts visibility to RVR 5000, LNAV/VNAV Cat E visibility to 1½ mile, and LNAV Cat E visibility to 1¾ mile. VDP and Baro-VNAV NA when using Hattiesburg/Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA. \*\* RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hattiesburg/Laurel Rgnl altimeter setting.

MALSR

MISSED APPROACH:  
Climb to 800 then climbing left turn to 3000 direct PAULD and hold.

|                                |                                           |                                           |                               |                         |
|--------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------|-------------------------|
| ATIS<br><b>126.475 291.675</b> | MERIDIAN APP CON★<br><b>120.5 269.325</b> | KEY TOWER★<br><b>133.975 (CTAF) 257.8</b> | GND CON<br><b>121.9 348.6</b> | UNICOM<br><b>122.95</b> |
|--------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------|-------------------------|

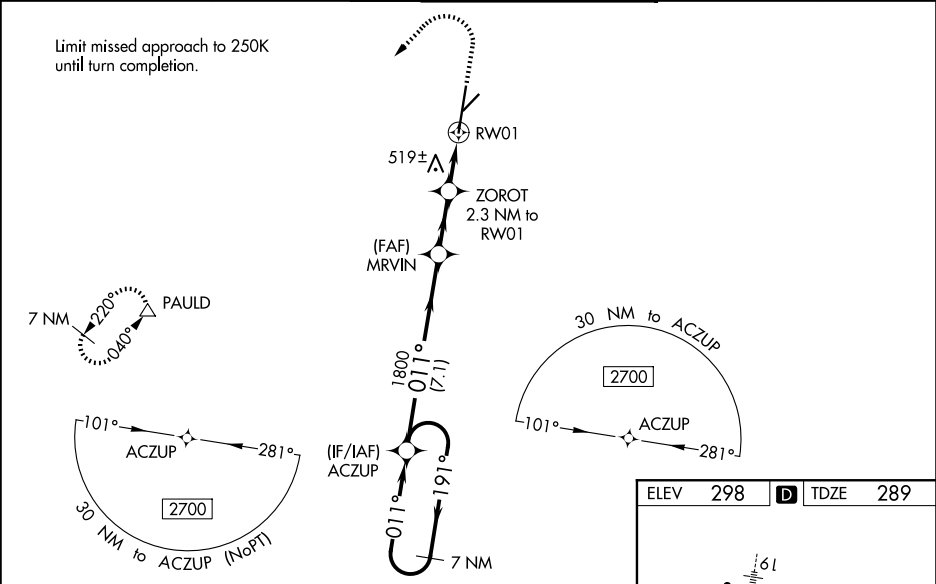

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

