


WAAS CH 69310 W10A	APP CRS 105°	Rwy Ldg TDZE 2869 Apt Elev 2872
--	------------------------	---

RNAV (GPS) RWY 10
MIDLAND INTL AIR AND SPACE PORT (M.A.F')

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 4700 direct EASYY and hold.
---	-----------	---

ATIS 126.8 235.975	MIDLAND APP CON* 124.6 290.4	MIDLAND TOWER* 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	UNICOM 122.95
------------------------------	--	---	-------------------------------	-------------------------

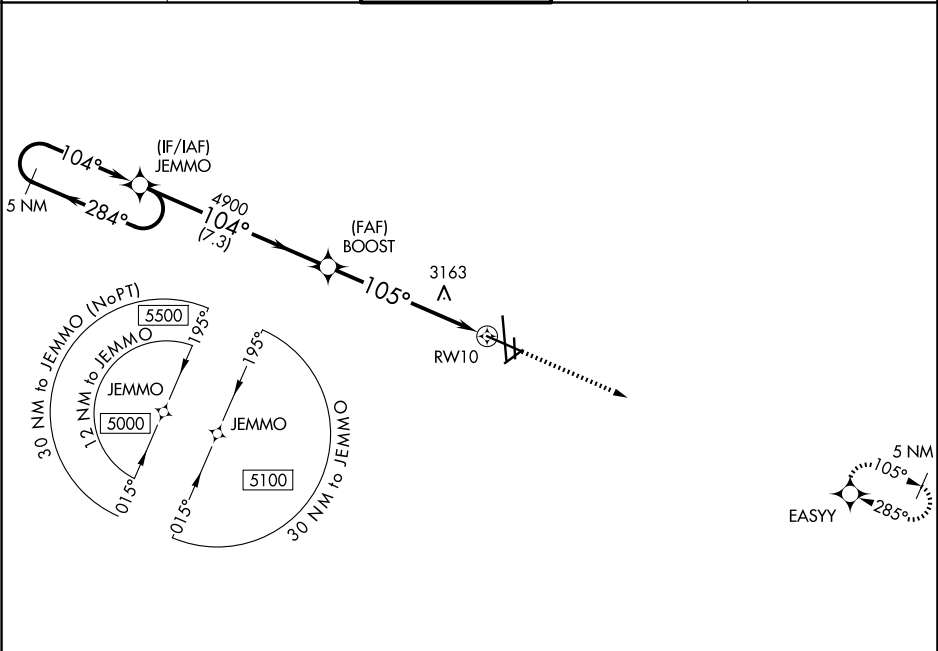

5 NM Holding Pattern	JEMMO	BOOST	4700	EASYY
5000 ←284° 104°→	104°	4900	*LNAV only	
GP 3.00° TCH 54	7.3 NM	4.4 NM	1.8 NM	
CATEGORY	A	B	C	D
LPV DA **	3069/24	200 (200-½)		
LNAV/ VNAV DA	3394-1¼	525 (600-1¼)		
LNAV MDA	3480/24	611 (700-½)	3480-1⅓	611 (700-1⅓)
CIRCLING	3480-1	608 (700-1)	3480-1¼ 608 (700-1¼)	3520-2 648 (700-2)

