

WAAS CH 45742 W01A	APP CRS 011°	Rwy Ldg 9080 TDZE 704 Apt Elev 728
--	------------------------	---

RNAV (GPS) RWY 1L
GENERAL MITCHELL INTL (MKE)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 6000, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2



MISSED APPROACH: Climb to 1130 then climbing left turn to 2900 direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125
------------------------	---	--	---------------------------------

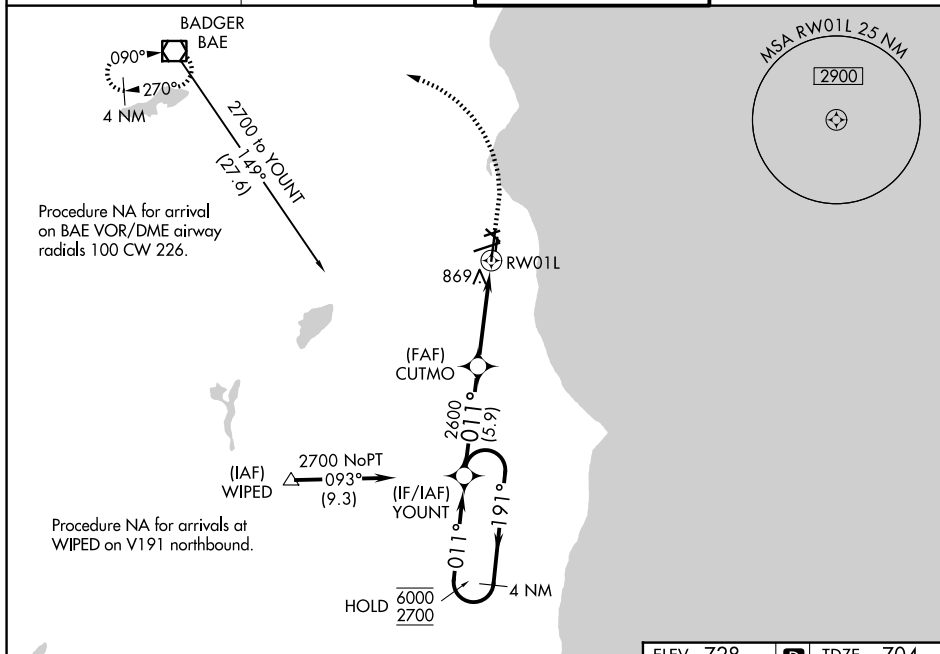

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 72).

4 NM Holding Pattern

YOUNT

CUTMO

6000 ← 191°

2700 → 011°

011°

2600

2600

1.1 NM to RW01L

RW01L

GP 3.00° TCH 56

5.9 NM

4.7 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	904/18		200 (200-½)	
RNAV/VNAV DA	1120/40		416 (400-¾)	
RNAV MDA	1120/24	416 (400-½)	1120/40	416 (400-¾)
CIRCLING	1240-1	512 (600-1)	1240-1½ 512 (600-1½)	1360-2 632 (700-2)

