
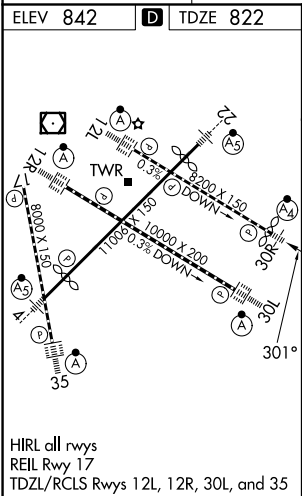


APP CRS	Rwy Ldg	8000
301°	TDZE	822
	Apt Elev	842

RNAV (RNP) Y RWY 30R
MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

RNP AR APCH - GPS. Authorization required. From HIGHA: RF.	MALSF	MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct GEP VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C. Inop table does not apply to RNP 0.15. Simultaneous approach authorized.		

D-ATIS	MINNEAPOLIS APP CON	MINNEAPOLIS TOWER	GND CON
135.35 239.275	118.725 335.65 (35) 119.3 335.65 (4-22, 12L-30R, 17) 126.95 335.65 (12R-30L)	123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (4-22, 12R-30L)	121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)

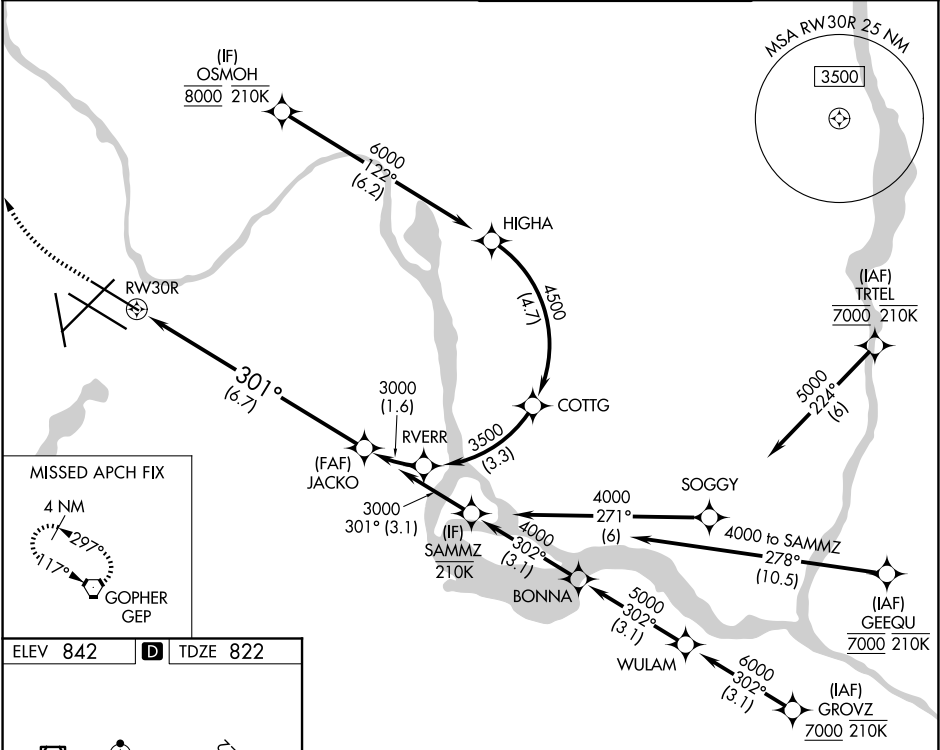

1300	3000	GEP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 71). See planview for multiple IF locations.	JACKO
				3000
RW30R				
GP 3.00° TCH 55				
6.7 NM				
CATEGORY	A	B	C	D
RNP 0.15 DA	1097/50 275 (300-1)			
RNP 0.30 DA	1298/60 476 (500-1¼)			
AUTHORIZATION REQUIRED				

NC-1, 06 AUG 2026 to 03 SEP 2026

NC-1, 06 AUG 2026 to 03 SEP 2026