


APP CRS	Rwy Ldg	9501
117°	TDZE	3200
	Apt Elev	3206

RNAV (RNP) Z RWY 12

MISSOULA MONTANA (MISO)

RNP AR APCH.		MALSR		MISSED APPROACH: Climb to 13000 on track 117° to OKASE and on track 123° to TAGOE and hold, continue climb-in-hold to 13000. *Missed approach requires minimum climb of 350 feet per NM to 8300; if unable to meet climb gradient, see RNAV (GPS) Y RWY 12. #Missed approach requires minimum climb of 425 feet per NM to 8300.
	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21° C (-6°F) or above 43°C (109°F).			
	For inop ALS, increase RNP 0.12 all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM. When local weather not received, procedure NA.			

ATIS	SPOKANE APP CON *	MISSOULA TOWER *	GND CON	UNICOM
126.65	124.9 298.95	118.4 (CTAF) 0 377.175	121.9	122.95

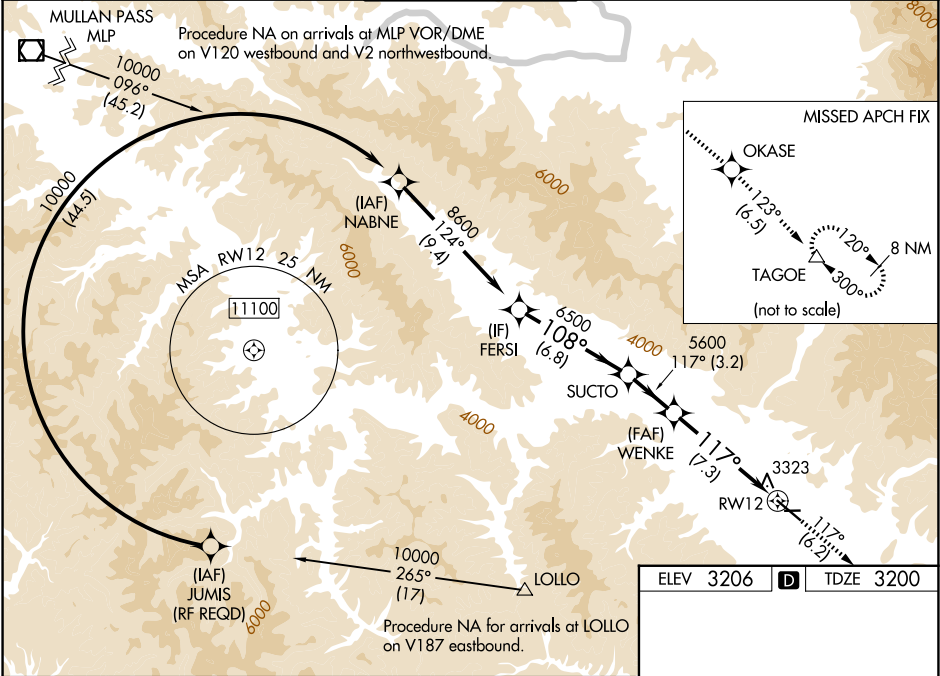

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).		13000 ↑ tr 117°	OKASE ✧	tr 123°	TAGOE △		
FERSI		SUCTO		WENKE		RW12	
8600		6500		5600		3323	
GP 3.00° TCH 45		6.8 NM		3.2 NM		7.3 NM	
CATEGORY	A	B	C	D			
RNP 0.12 DA#	3518/40		318 (400-¾)				
RNP 0.30 DA*	3880-2		680 (700-2)				
AUTHORIZATION REQUIRED							REIL Rwy 30 MIRL Rwy 8-26 HIRL Rwy 12-30

NW-1, 06 AUG 2026 to 03 SEP 2026

NW-1, 06 AUG 2026 to 03 SEP 2026