

WAAS CH 42515 W13A	APP CRS 126°	Rwy Ldg TDZE Apt Elev	7032 590 590
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13

QUAD CITIES INTL (MLI)

⚠ Circling to Rwy 5 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting and increase LPV DA to 955 feet, LNAV/VNAV DA to 1339 feet and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D, and Circling Cats C and D visibility ¼ SM. Rwy 13 helicopter reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Davenport altimeter setting.

MISSED APPROACH: Climb to 3000 direct ARACI and on track 195° to MIGNE and on track 275° to MZV VOR/DME and hold.

ATIS 121.2	QUAD CITY APP CON ★ 125.95 257.8	QUAD CITY TOWER ★ 119.4(CTAF) 269.55	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

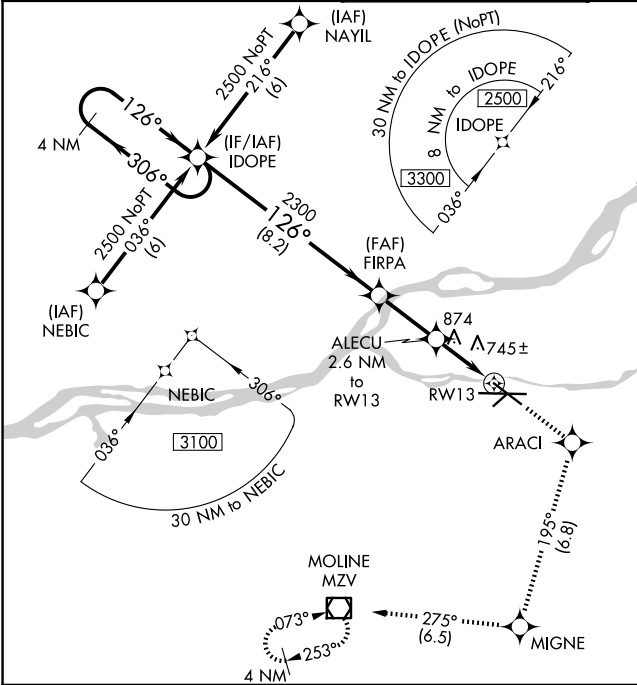

ELEV 590	D TDZE 590
----------	-------------------

4 NM Holding Pattern		IDOPE		3000 ↑		ARACI ✱		tr 195°		MIGNE ✱		tr 275°		MZV ◻		
2500 ← 306° 126° →		126°		FIRPA		ALECU 2.6 NM to RW13		*1.6 NM to RW13		RW13		*LNAV only				
GP 3.00° TCH 48		2300		*1460												
		8.2 NM		2.6 NM		1		1.6								
CATEGORY	A		B		C		D									
LPV DA			908-1		318 (400-1)											
LNAV/VNAV DA			1292-2½		702 (800-2½)											
LNAV MDA	1140-1		550 (600-1)		1140-1½ 550 (600-1½)		1140-1¾ 550 (600-1¾)									
CIRCLING	1140-1 550 (600-1)		1200-1 610 (700-1)		1320-2 730 (800-2)		1420-2¾ 830 (900-2¾)									

