

VORTAC MLU	APP CRS	Rwy Ldg
117.2	236°	7504
Chan 119		TDZE 78
		Apt Elev 79

VOR RWY 22
MONROE RGNL (MLU)

DME required.

⚠


Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-22 Cat A/B ASR visibility to 1 SM, and Cat C/D to 1½ SM.


MALSR

MISSED APPROACH:

Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON★ 118.15 290.475	MONROE TOWER★ 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

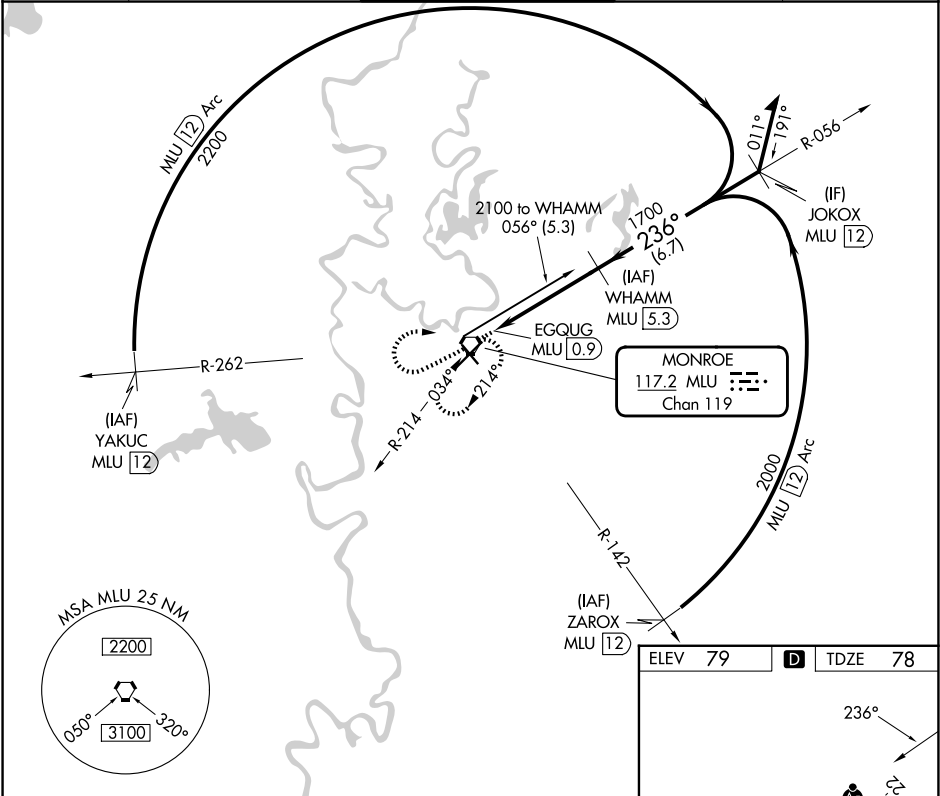

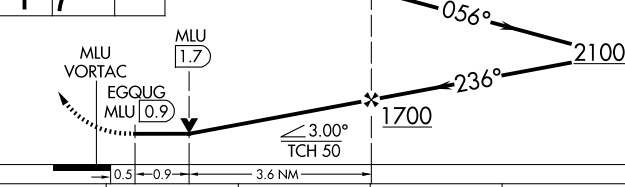1800	3000	MLU				
						
						
CATEGORY	A		B			
S-22	560-3/4 482 (500-3/4)		560-1		482 (500-1)	
CIRCLING	560-1 481 (500-1)	580-1 501 (600-1)	740-13/4 661 (700-13/4)	1160-3 1081 (1100-3)		

