


LOC I-BSQ	APP CRS	Rwy Ldg	9503
111.9	357°	TDZE	25
		Apt Elev	25

ILS or LOC RWY 36
MYRTLE BEACH INTL (MYR)

RADAR required.	MALSF	MISSED APPROACH: Climb to 3000 on heading 357° expect RADAR vectors to KOOKE INT/FAY 62.9 DME and hold.
For inop ALS increase S-LOC 36 Cats D/E visibility to RVR 5000.		

ATIS 123.925	MYRTLE BEACH APP CON ★ (171° - 321°) 127.4 257.95 (322° - 170°) 119.2 350.3	MYRTLE BEACH TOWER ★ 128.45 (CTAF) 0 259.3	GND CON 120.3 275.8	CLNC DEL 120.3	UNICOM 122.95
-----------------	---	---	------------------------	-------------------	------------------

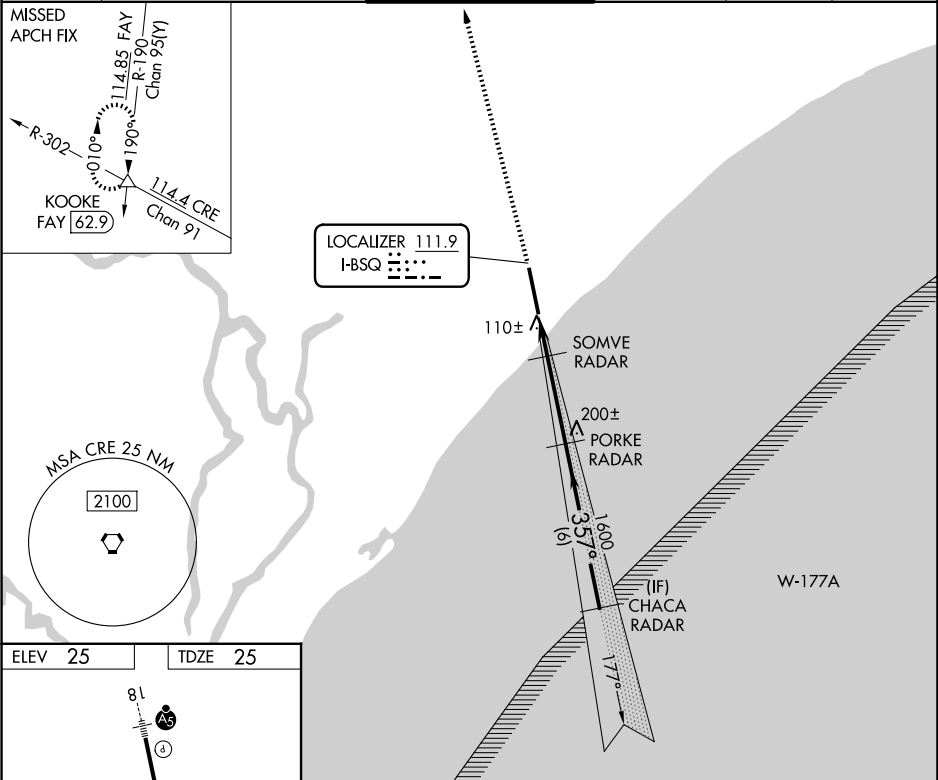

ELEV 25	TDZE 25
81	45
TWR	9503 X 150
36	357°
HIRL Rwy 18-36	
FAF to MAP 4.8 NM	
Knots	60 90 120 150 180
Min:Sec	4:48 3:12 2:24 1:55 1:36