

WAAS
CH **56224**
W04A

APP CRS
039°

Rwy Ldg **8459**
TDZE **10**
Apt Elev **17**

RNAV (GPS) RWY 4L

NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS.

▼

▲


When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.

MALSR

AS

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 520, then climbing right turn to 2000 direct TYNIE, and on track 015° to NEBTE, cross NEBTE at or below 2000, then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

D-ATIS 115.7 134.825	NEWARK APP CON 128.55 379.9	NEWARK TOWER 118.3 257.6	GND CON 121.8
--------------------------------	---------------------------------------	------------------------------------	-------------------------

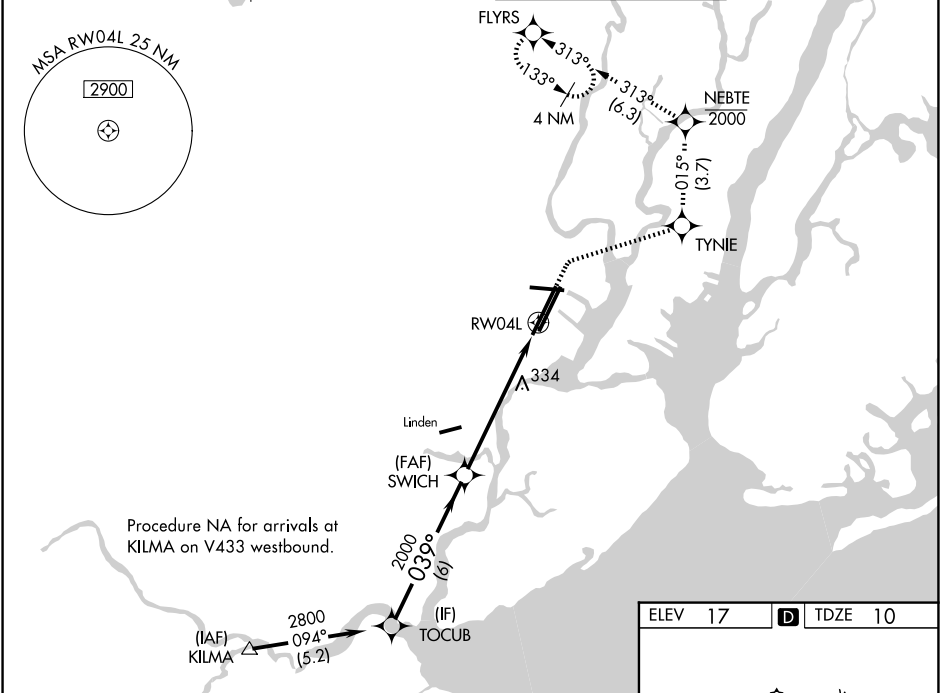

TOCUB

520

2000

TYNIE

tr 015°

NEBTE

3000

tr 313°

FLYRS

GP 3.00°
TCH 52

2800

039°

2000

SWICH

2000

1.6 NM to RWY 4L

RWY 4L

6 NM

4.5 NM

1.6

VGSI and RNAV glidepath not coincident (VGSI Angle 3.10/TCH 77).

CATEGORY	A	B	C	D
LPV DA	210/18 200 (200-½)			
LNAV/ VNAV DA	550/55 540 (600-1)			
LNAV MDA	600/24	590 (600-½)	600-1¼	590 (600-1¼)
CIRCLING	760-1	743 (800-1)	900-2¾ 883 (900-2¾)	900-3 883 (900-3)

TWR

22L-22R

6/25 X 150

1000 X 150

550 X 150

4R

039°

HIRL all rwys

REIL Rws 11, 22R, and 29

TDZL/RCLS all rwys

NE-2, 06 AUG 2026 to 03 SEP 2026

NE-2, 06 AUG 2026 to 03 SEP 2026