


WAAS CH 60924 W04B	APP CRS 039°	Rwy Ldg 8809 TDZE 11 Apt Elev 17
--	------------------------	---

RNAV (GPS) Y RWY 4R
NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS. RADAR required. ⚠ When Circling to Rwy 29 at night, operational VGSi required, remain on or above VGSi glidepath until threshold.	ALSf-2 	MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 550 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.
---	------------	--

D-ATIS 115.7 134.825	NEWARK APP CON 128.55 379.9	NEWARK TOWER 118.3 257.6	GND CON 121.8
--------------------------------	---------------------------------------	------------------------------------	-------------------------

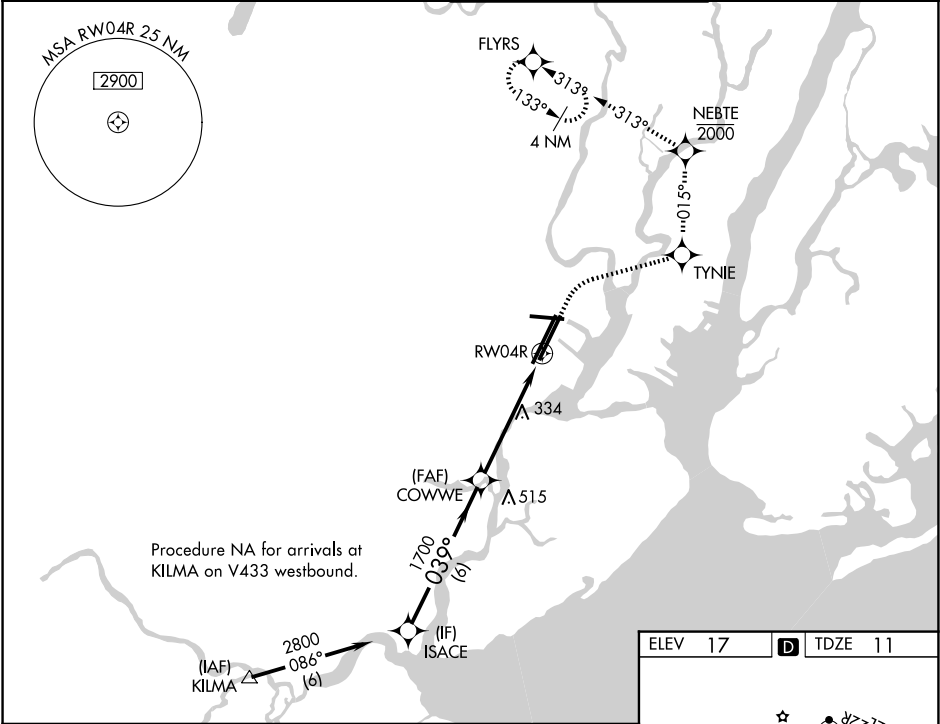

	550	2000	TYNIE	NEBTE	3000	FLYRS
			tr 015°	2000	tr 313°	
VGSi and RNAV glidepath not coincident (VGSi Angle 2.95/TCH 71°).						
ISACE	2800	039°	1700	1700	1.7 NM to RW04R	
GP 3.04° TCH 55						
	6 NM		3.4 NM	1.7		
CATEGORY	A	B	C	D		
LPV DA		211/18	200 (200-1/2)			
LNAV MDA	600/24	589 (600-1/2)	600-1 1/4	589 (600-1 1/4)		
CIRCLING	760-1	743 (800-1)	900-2 3/4 883 (900-2 3/4)	900-3 883 (900-3)		

