

WAAS CH 42701 W17A	APP CRS 173°	Rwy Ldg 6014 TDZE 1351 Apt Elev 1354
--	------------------------	---

RNAV (GPS) RWY 17R

CLARENCE E PAGE MUNI (R/C/E)


▼

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wiley Post altimeter setting and increase all DA 29 feet and all MDA 40 feet and increase LPV all Cats visibility ¼ mile. VDP NA when using Wiley Post altimeter setting.

⚠

MISSED APPROACH: Climb to 3800 direct JEBGO and hold.

AWOS-3 125.05	OKE CITY APP CON 124.6 266.8	UNICOM 123.0 (CTAF) 📶
-------------------------	--	--

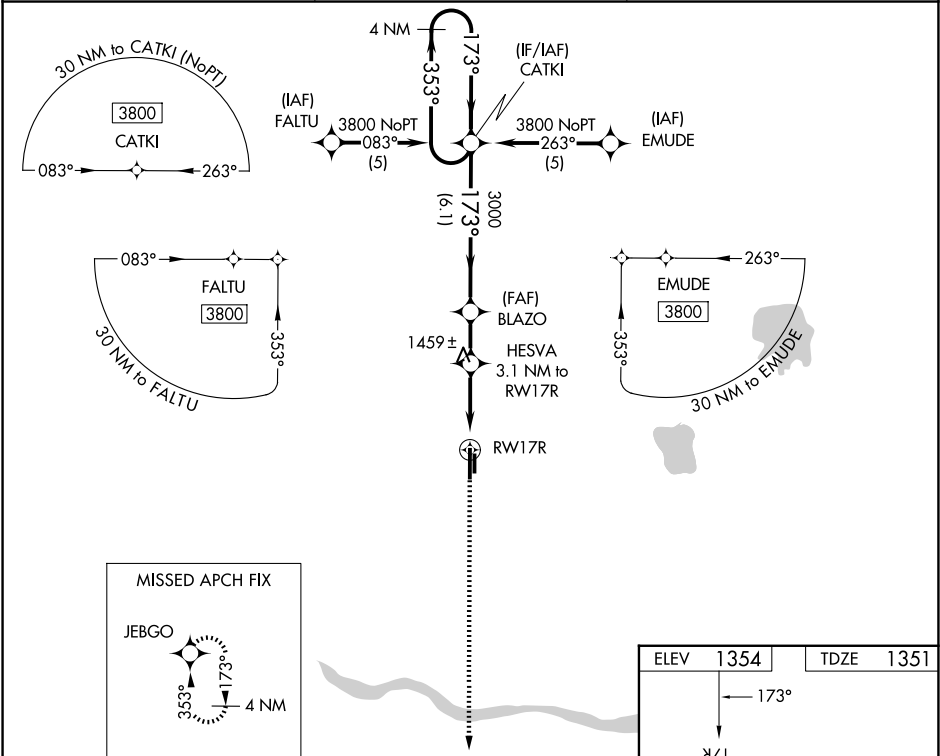

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident. (VGSi Angle 3.00/TCH 52).		3800	JEBGO
CATKI		BLAZO		HESVA	3.1 NM to RW17R
3800 ← 353°		173° →		*1.1 NM to RW17R	
GP 3.00° TCH 52		3000		RW17R	
		*2380		*LNAV only	
6.1 NM		1.9 NM		2 NM	
				1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1601-¾ 250 (300-¾)			NA	
LNNAV MDA	1760-1	409 (500-1)	1760-1¼ 409 (500-1¼)	NA	
CIRCLING	1800-1 446 (500-1)	1820-1 466 (500-1)	1840-1½ 486 (500-1½)	NA	

ELEV	1354	TDZE	1351
173°			
17R			
601.4 X 100			
3502 X 75			
35R			
35L			
MIRL Rwy 17L-35R			
HIRL Rwy 17R-35L			