

APP CRS
356°

Rwy Ldg
TDZE
Apt Elev

9802
1294
1296

RNAV (RNP) Z RWY 35R

OKC WILL ROGERS INTL (OKC)



ASR

For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized with Rwy 35L.
Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSf-2

MISSED APPROACH: Climb to 5000 on track 356° to ATREC and hold, continue climb-in-hold to 5000.

D-ATIS 125.85	OKE CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6
------------------	---------------------------------	-------------------------------	------------------------

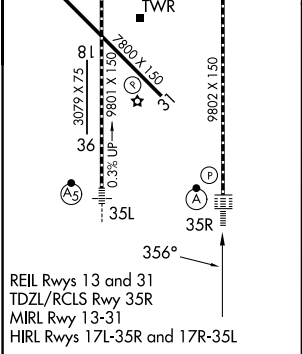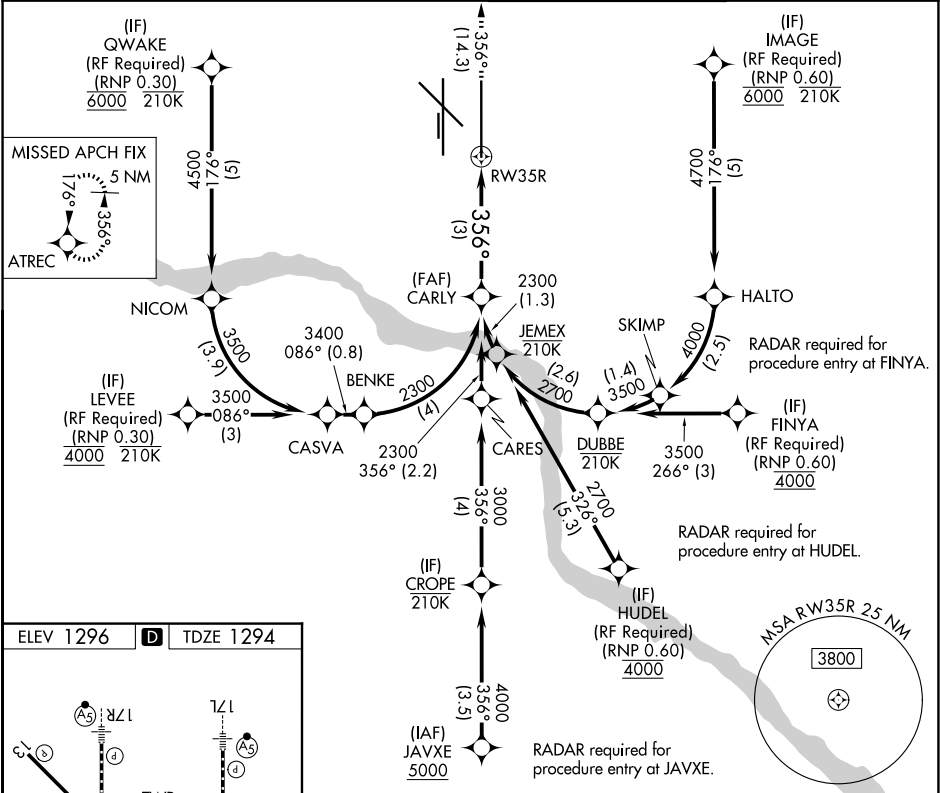

5000

tr
356°

ATREC

See planview for multiple IF locations.

RW35R

356°

CARLY
2300

2300

GP 3.00°
TCH 56

3 NM

CATEGORY

A

B

C

D

RNP 0.16 DA

1570/24

276 (300-½)

RNP 0.30 DA

1674/39

380 (400-¾)

AUTHORIZATION REQUIRED