
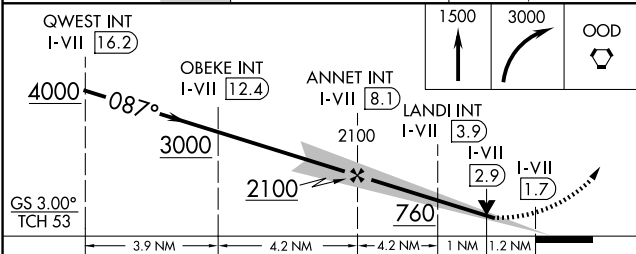


LOC/DME I-VII 108.95 Chan 26(Y)	APP CRS 087°	Rwy Ldg TDZE 13 Apt Elev 36
--	------------------------	--

ILS or LOC RWY 9L
PHILADELPHIA INTL (PHL)

▼ For inop ALS, increase S-LOC 9L Cat C/D visibility to 2 SM. ▲ * RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OOD VORTAC and hold.
---	--------------	--

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

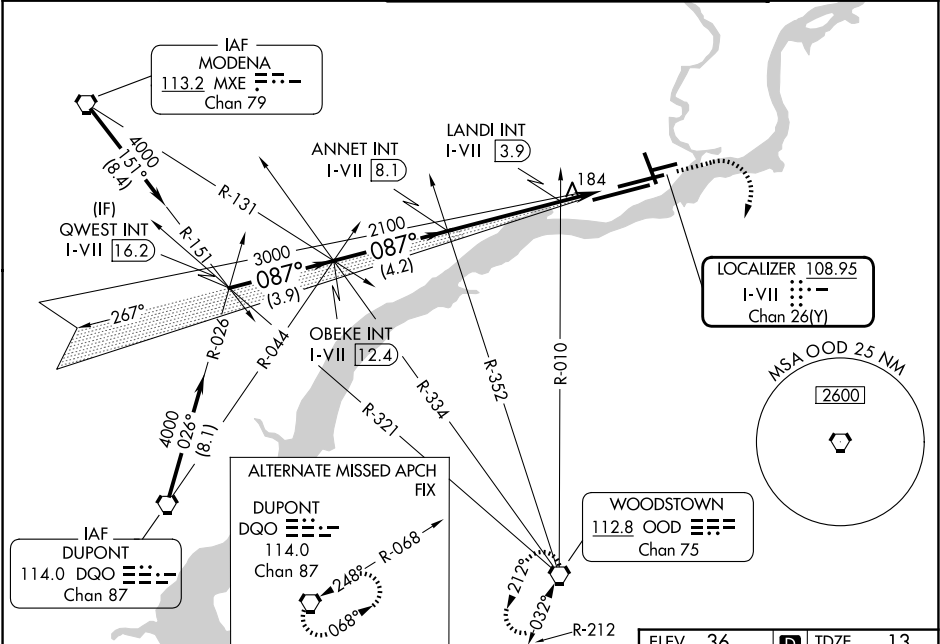

CATEGORY	A	B	C	D
S-ILS 9L*	213/24 200 (200-1/2)			
S-LOC 9L	760/24 747 (800-1/2)	760/40 747 (800-3/4)	760-1 3/4 747 (800-1 3/4)	747 (800-1 3/4)
CIRCLING	760-1 724 (800-1)	760-1 1/4 724 (800-1 1/4)	760-2 724 (800-2)	760-2 1/4 724 (800-2 1/4)
LANDI FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 9L	440/24 504 (600-1)	427 (500-1/2)	440/40 584 (600-1 1/2)	427 (500-3/4)
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1 1/2 584 (600-1 1/2)	720-2 1/4 684 (700-2 1/4)

