


WAAS CH 45523 W09B	APP CRS 087°	Rwy Ldg TDZE 13 Apt Elev 36
--	------------------------	---

RNAV (GPS) Y RWY 9L
PHILADELPHIA INTL (PHL)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to RVR 4500, all Cats. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSRL A5 MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 direct OOD VORTAC and hold.
--	--

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

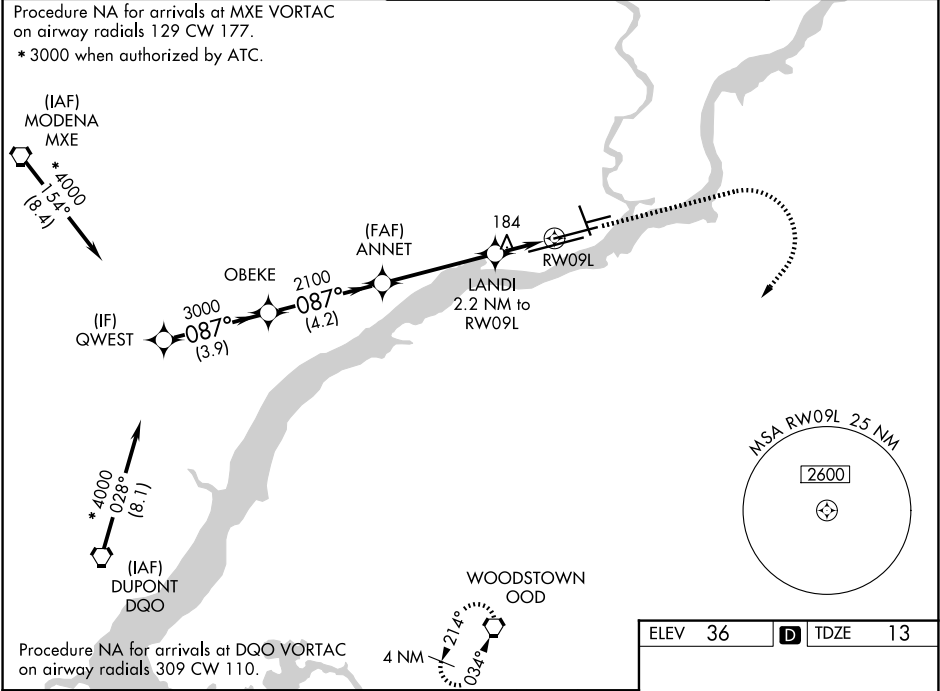

* 3000 when authorized by ATC.	ELEV 36	TDZE 13
GP 3.00° TCH 53		
3.9 NM	4.2 NM	4.2 NM
1 NM	1.2 NM	
QWEST	OBEKE	ANNET
* 4000 087°	3000	2100
760	2100	760
LANDI 2.2 NM to RWY09L	1.2 NM to RWY09L	RWY09L
213/24	200 (200-½)	
325/24	312 (300-½)	
440/24	427 (500-½)	440/40 427 (500-¾)
540-1	600-1	620-1½ 720-2¼
504 (600-1)	564 (600-1)	584 (600-½) 684 (700-2¼)
TDZ/CL Rwy 9R HIRL all Rwy REIL Rwy 9L and 35		