


VORTAC RBL	APP CRS	Rwy Ldg	5431
115.7	149°	TDZE	352
Chan 104		Apt Elev	352

VOR/DME RWY 15
RED BLUFF MUNI (RBL)


⚠ When local altimeter setting not received, use Redding altimeter setting and increase all MDAs and all Cat C/D visibility ¼ SM. VDP NA with Redding altimeter setting.

MISSED APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 📻
-----------------	-------------------------------	---------------------------------

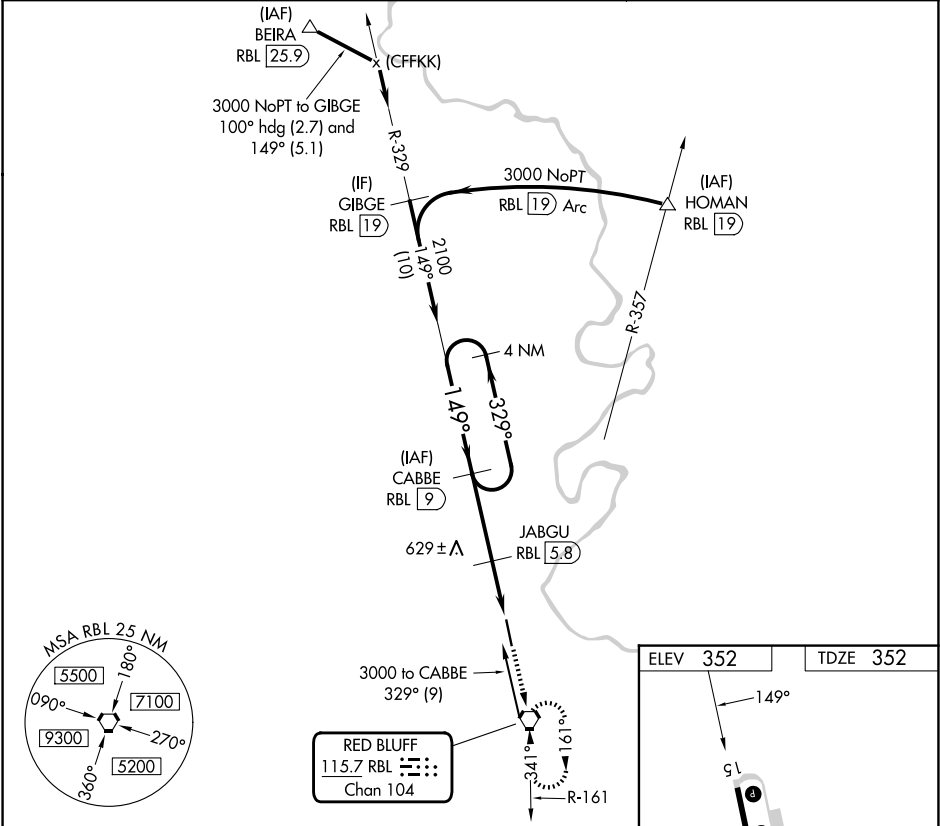

4 NM Holding Pattern 2100 ← 329° 149° →				CABBE RBL [9] 1080 2.99° TCH 40 3.2 NM				JABGU RBL [5.8] RBL [5.2] RBL [3.6] 0.6 NM 1.6 NM				2000 RBL	
CATEGORY	A			B			C			D			
S-15	880-1 528 (600-1)						880-1½ 528 (600-1½)						
CIRCLING	880-1 528 (600-1)						900-1½ 548 (600-1½)			1060-2¼ 708 (800-2¼)			

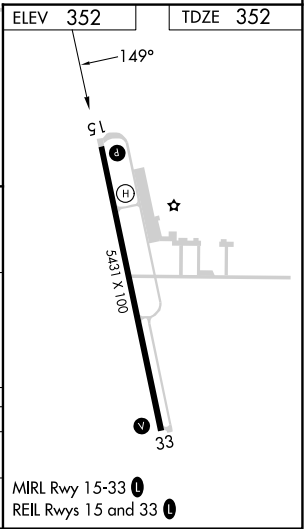

SW-2, 06 AUG 2026 to 03 SEP 2026

SW-2, 06 AUG 2026 to 03 SEP 2026