


APP CRS	Rwy Ldg	10011
347°	TDZE	4410
	Apt Elev	4415

RNAV (RNP) Z RWY 35L

RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS, min RNP 0.30. Authorization required.	MALSR	MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. # Missed approach requires minimum climb of 216 feet per NM to 7200. *Missed approach requires minimum climb of 301 feet per NM to 7200.
For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 35°C.		

D-ATIS 135.8 363.0	NORCL APP CON 119.2 279.55 126.3 353.9	RENO TOWER 118.7 257.8	GND CON 121.9 348.6
-----------------------	--	---------------------------	------------------------

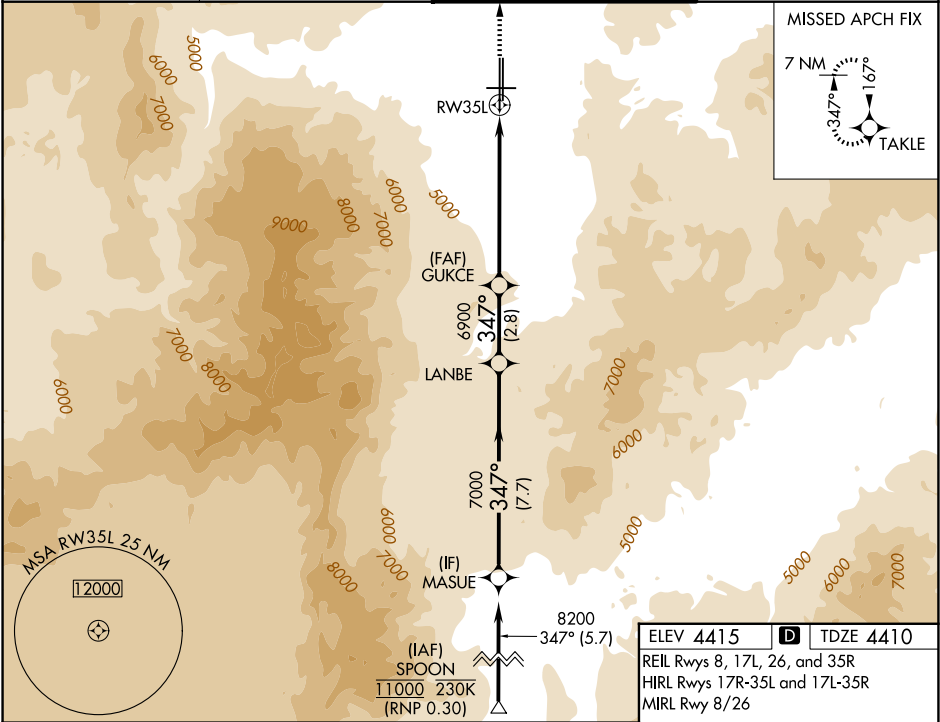

MASUE	8200	LANBE	6900	GUKCE	6900	RW35L
GP 3.50° TCH 72	7.7 NM	2.8 NM	6.5 NM			
347°	347°	347°	347°	347°	347°	347°
GP 3.50° TCH 72						
CATEGORY	A	B	C	D		
RNP 0.10 DA *		4753-5/8	343 (400-5/8)			
RNP 0.20 DA #		5193-13/4	783 (800-13/4)			
RNP 0.30 DA		5353-2	943 (1000-2)			
AUTHORIZATION REQUIRED						

