

WAAS

CH **45611**

W04A

APP CRS

044°

Rwy Ldg

8001

TDZE

535

Apt Elev

559

RNAV (GPS) RWY 4

FREDERICK DOUGLASS/GREATER ROCHESTER INTL (ROC)

RNP APCH - GPS.

ALSF-2


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 1/2 SM.

MISSED APPROACH:

Climb to 1500 then climbing right turn to 3000 direct BILAW and hold.

ATIS 124.825	ROCHESTER APP CON 119.55 269.6	ROCHESTER TOWER 118.3 254.3	GND CON 121.7
------------------------	--	---------------------------------------	-------------------------

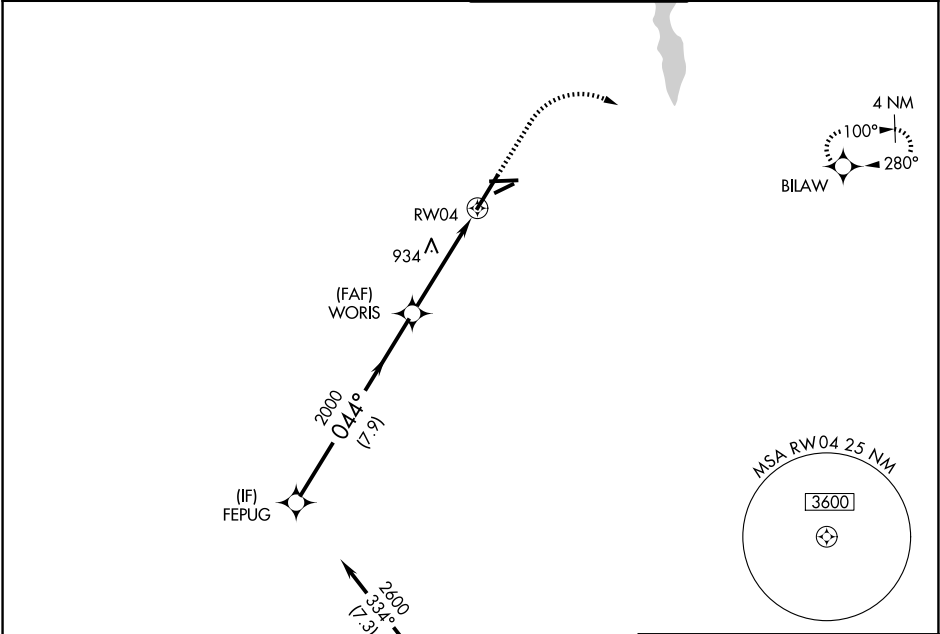

ELEV 559

D TDZE 535

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

2600

044°

2000

1.9 NM to RWY 04

RWY 04

GP 3.00° TCH 56

7.9 NM

2.6 NM

1.9

1500

3000

BILAW

CATEGORY	A	B	C	D
LPV DA		735/18	200 (200-1/2)	
LNAV/VNAV DA		1290-2 1/4	755 (800-2 1/4)	
LNAV MDA	1200/24	665 (700-1/2)	1200-1 1/2	665 (700-1 1/2)
CIRCLING	1200-1	641 (700-1)	1500-2 3/4 941 (1000-2 3/4)	1500-3 941 (1000-3)

044°

TDZ/CL Rwy 4

REIL Rws 7, 10 and 25

MIRL Rwy 7-25

HIRL Rws 10-28 and 4-22