

WAAS CH 49216 W27A	APP CRS 270°	Rwy Ldg TDZE 6765 Apt Elev 6765
--	------------------------	---

RNAV (GPS) RWY 27

SOUTHWEST WYOMING RGNL (RKS)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 44°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.


MALSR

AS

MISSED APPROACH: Climb to 9800

direct REGVE and hold.

AWOS-3 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

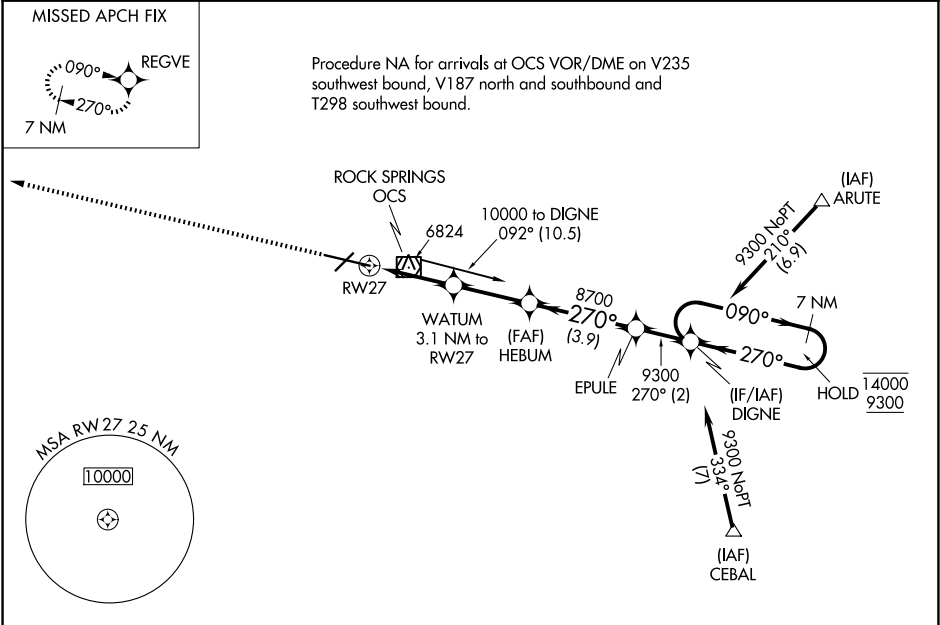

ELEV 6765	D	TDZE 6765
-----------	----------	-----------

9800

REGVE

WATUM
3.1 NM to RW27

HEBUM
8700

EPULE
9300

DIGNE
9300

7 NM Holding Pattern

*LNAV only.

*0.9 NM to RW27

7800*

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
LPV DA		6965-½	200 (200-½)	
LNAV/VNAV DA		7036-½	271 (300-½)	
LNAV MDA		7100-½	335 (400-½)	
CIRCLING	7140-1 375 (400-1)	7220-1 455 (500-1)	7220-1½ 455 (500-1½)	7540-2 ½ 775 (800-2 ½)

MIRL Rwy 3-21

HIRL Rwy 9-27 0

REIL Rwy 3 and 21 0