


WAAS CH 40015 W28A	APP CRS 277°	Rwy Ldg 9351 TDZE 50 Apt Elev 50
--	------------------------	---


RNAV (GPS) Z RWY 28
SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).		MISSED APPROACH: Climb to 2600 direct TILEE and hold.
--	--	---

ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------	---	--	-------------------------------	-------------------------

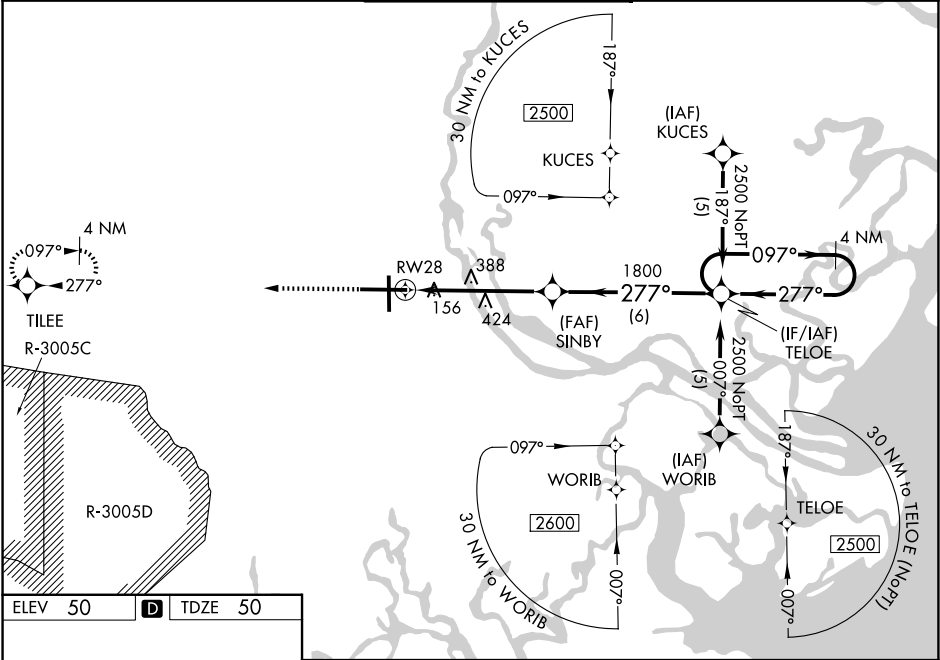

ELEV 50	D	TDZE 50
---------	----------	---------



TDZL/RCLS Rwy 10
REIL Rws 19 and 28
HIRL Rws 1-19 and 10-28

2600 TILEE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).		TELOE		4 NM Holding Pattern	
*LNAV only.		SINBY					
RW28		1.8 NM to RW28		277°		097°→ 2500 ← 277°	
1.8 NM		3.5 NM		6 NM		GP 3.00° TCH 52	
CATEGORY	A		B		C		D
LPV DA	307-1 257 (300-1)						
LNAV/ VNAV DA	431-1¼ 381 (400-1¼)						
LNAV MDA	680-1 630 (700-1)				680-1¾ 630 (700-1¾)		
CIRCLING	680-1 630 (700-1)				740-2 690 (700-2)		740-2¼ 690 (700-2¼)