



WAAS CH 57911 W13A	APP CRS 133°	Rwy Ldg 9002 TDZE 1095 Apt Elev 1098
--	------------------------	---

RNAV (GPS) RWY 13

SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SU_X)

RNP APCH-GPS. ▼ ▲ Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cat E visibility to 1½ SM.	MALS 	MISSED APPROACH: Climb to 3900 direct WAVUK and hold.
---	----------	---

ATIS 119.45 270.8	SIoux CITY APP CON ★ 124.6 307.0	SIoux CITY TOWER ★ 118.7 (CTAF) 0 254.3	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	---	-------------------------------	-------------------------

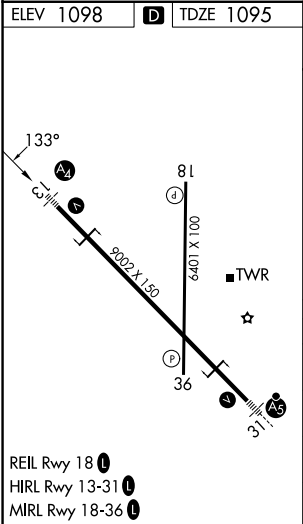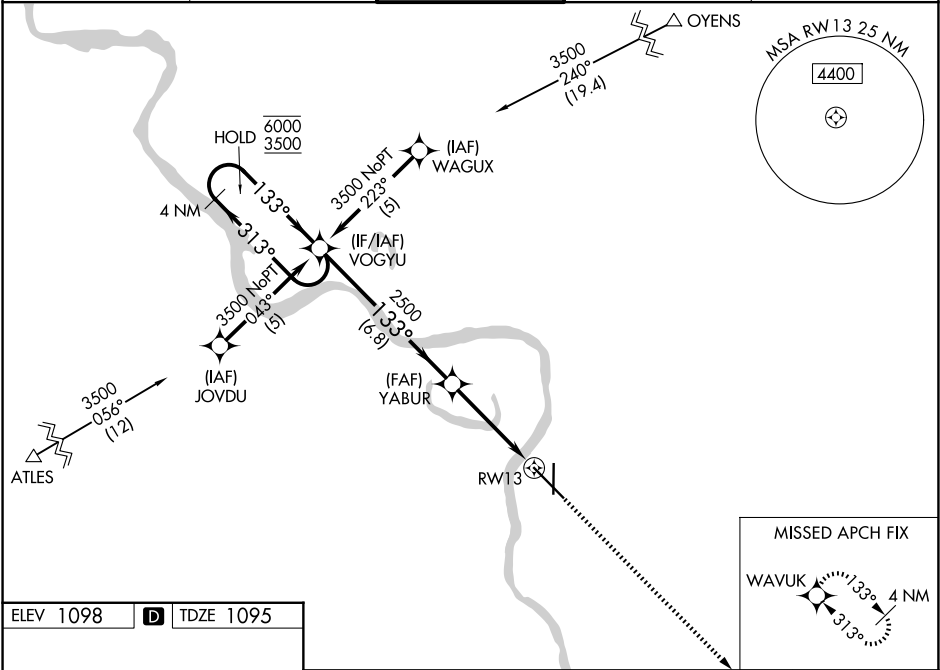

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).					
4 NM Holding Pattern					
6000 ← 313° 3500 → 133° GP 3.00° TCH 54					
VOGYU YABUR 2500 2500 3900 WAVUK *1.5 NM to RW13 RW13 *LNAV only.					
6.8 NM 2.7 NM 1.5 NM					
CATEGORY	A	B	C	D	E
LPV DA	1295/40 200 (200-¾)				
LNAV/VNAV DA	1582/60 487 (500-1¼)				
LNAV MDA	1620/40 525 (600-¾)		1620-1¼ 525 (600-1¼)		
CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1¼ 602 (700-1¼)	1860-2½ 762 (800-2½)	2000-3 902 (1000-3)

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026