

SIoux FALLS, SOUTH DAKOTA

HI-ILS Z or LOC Z RWY 3

LOC I-FSD <u>109.9</u>	APCH CRS 030°	Rwy Idg 8999 TDZE 1424 Arpt Elev 1430
----------------------------------	-------------------------	--

[USAF]

JOE FOSS FLD (KFSD)




RADAR and DME required.

T * When ALS inop, increase CAT CDE RVR to 40, vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT CDE vis to $1\frac{7}{8}$ miles.
 *** When ALS inop, increase CAT CDE vis to $1\frac{3}{8}$ miles.




MISSED APPROACH: Climb to 3000, then climbing left turn to 5000 on heading 230° and FSD VORTAC R-269 to FRYRE (FSD 1.5 DME) and hold.

ATIS 126.6	SIJOUX FALLS APP CON 125.8 306.2	SIJOUX FALLS TOWER ★ 118.3(CTAF) 257.8	GND CON 121.9 348.6	ASR
---------------	-------------------------------------	---	------------------------	-----

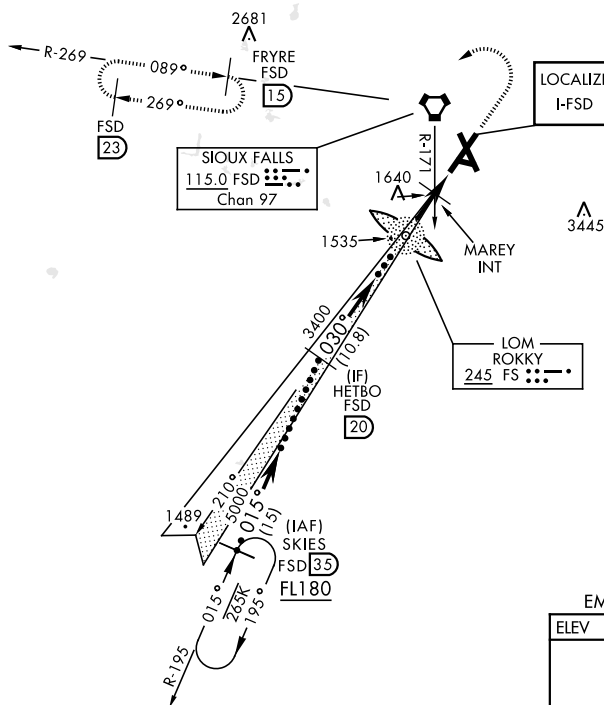


EMERG SAFE ALT 100 NM 4600

ELEV	1430	D	TDZE	1424
------	------	----------	------	------

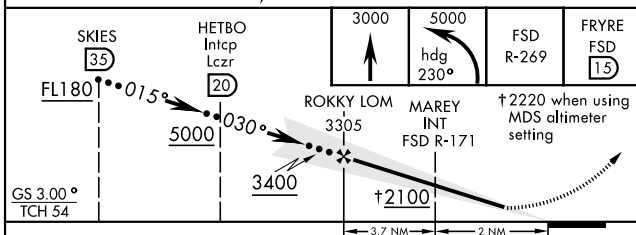

CATEGORY	C	D	E
S-ILS 3 *	1674/24	250	(300-1/2)
S-LOC 3 **	2100-1 1/2 676 (700-1 1/2)	2100-1 1/2 676	(700-1 1/2)
CIRCLING	2100-1 1/8 670 (700-1 1/8)	2200-2 1/2 770 (800-2 1/2)	2300-3 870 (900-3)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)			
S-LOC 3 ***	1940/55	516	(600-1)
CIRCLING	2060-1 3/4 630 (700-1 3/4)	2200-2 1/2 770 (800-2 1/2)	2300-3 870 (900-3)

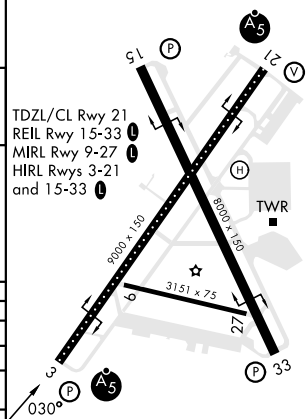

FAF to MAP 5.7 NM

Knots	120	140	160	180	200
Min:Sec	2:51	2:27	2:08	1:54	1:43

SIOUX FALLS, SOUTH DAKOTA

43°35'N-96°45'W

JOE FOSS FLD (KFSD)

Amdt 10 07AUG25

HI-ILS Z or LOC Z RWY 3