

LOC FSD
109.9

APP CRS
030°

Rwy Ldg
8999
 TDZE
1424
 Apt Elev
1430

ILS or LOC RWY 3
 JOE FOSS FLD (FSD)

ADF or RADAR required.


MALSR

MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.

For inop ALS, increase S-LOC 3 Cats C/D visibility to 1½ SM, and S-LOC 3 MAREY fix minimums Cats C/D to 1½ SM.

-30°C

ATIS 126.6	SIOUX FALLS APP CON* 125.8 284.725	SIOUX FALLS TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

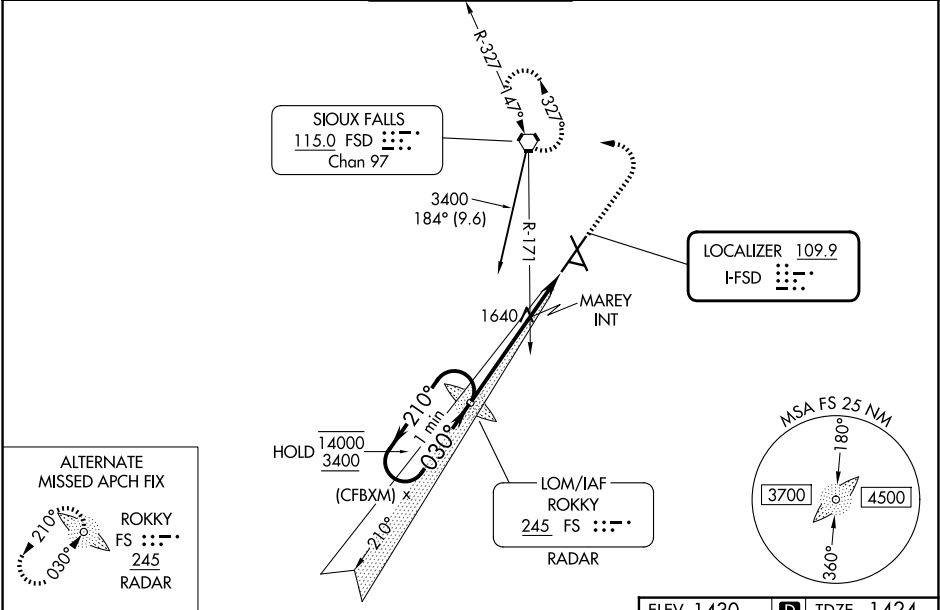

One Minute Holding Pattern FS LOM ROKKY RADAR 3400 FSD 14000 3400 GS 3.00° TCH 54 210° 030° 3400 3305 MAREY INT 2100 3.7 NM 2 NM				
CATEGORY	A	B	C	D
S-ILS 3	1674/24 250 (300-½)			
S-LOC 3	2100/24	676 (700-½)	2100-1½	676 (700-1½)
CIRCLING	2100-1	670 (700-1)	2100-1⅞ 670 (700-1⅞)	2200-2½ 770 (800-2½)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 3	1940/24	516 (600-½)	1940/55	516 (600-1)
CIRCLING	1980-1	550 (600-1)	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

ELEV 1430

D

 TDZE 1424

TDZ/CL Rwy 21
 MIRL Rwy 9-27
 REIL Rwys 15 and 33
 HIRL Rwys 3-21 and 15-33

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

NC-1, 06 AUG 2026 to 03 SEP 2026

NC-1, 06 AUG 2026 to 03 SEP 2026