



WAAS CH 87010 W29A	APP CRS 294°	Rwy Ldg 8650 TDZE 32 Apt Elev 33
--	------------------------	---

RNAV (GPS) RWY 29R
STOCKTON METRO (SCK)

RNP APCH.			MALSR 	MISSED APPROACH: Climb to 2700 direct HAXEK and hold.
T	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500. #RVR 1800 authorized with use of FD or AP or HUD to DA.			
ATIS 118.25	NORCAL APP CON 123.85 278.3 (SE-NW) 125.1 363.2 (N-SE)	STOCKTON TOWER ★ 120.3 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95

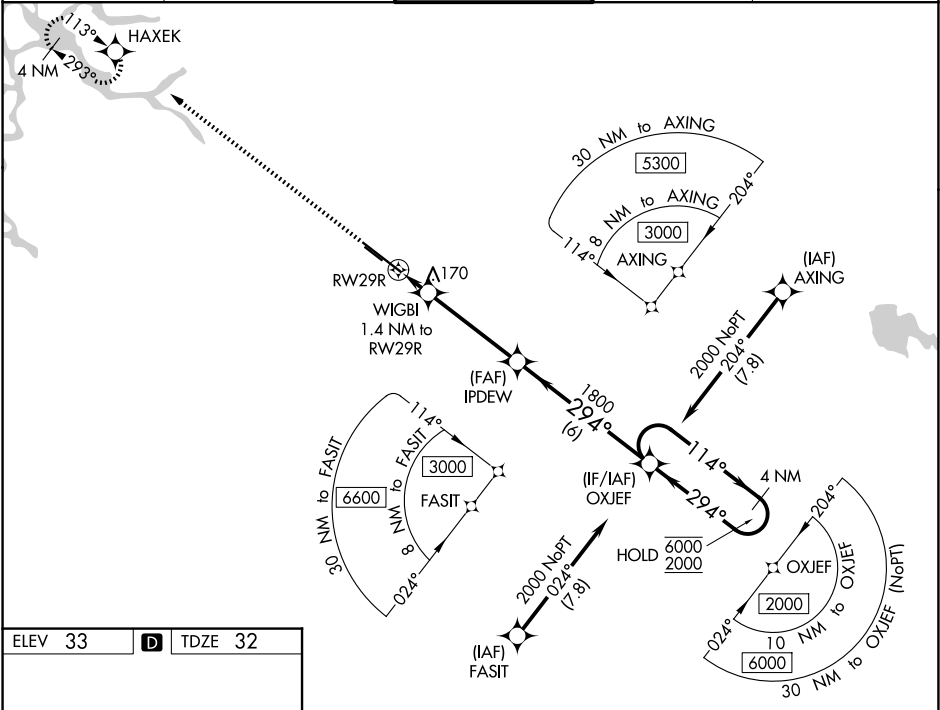

ELEV 33	D	TDZE 32
---------	----------	---------

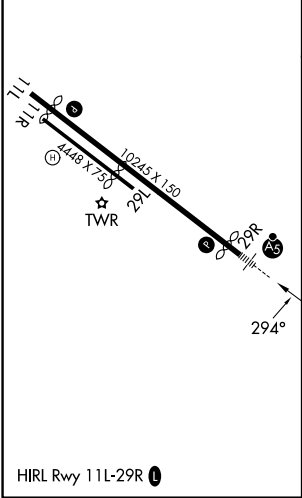

2700	HAXEK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).		OXJEF	4 NM Holding Pattern
*LNAV only	WIGBI 1.4 NM to RW29R	IPDEW 1800	294°	114°	6000 2000
RW29R	520*	1.4 NM	4.1 NM	6 NM	GP 3.00° TCH 55
CATEGORY	A	B	C	D	
LPV DA#		232/24	200 (200-½)		
LNAV/VNAV DA		320/24	288 (300-½)		
LNAV MDA	420/24	388 (400-½)	420/35	388 (400-¾)	
CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)	

SW-2, 06 AUG 2026 to 03 SEP 2026

SW-2, 06 AUG 2026 to 03 SEP 2026