



TACAN FOE Chan 53 (111.6)	APP CRS 304°	Rwy Ldg TDZE Apt Elev	12803 1037 1078
---	------------------------	-----------------------------	--

TACAN RWY 31
TOPEKA RGNL (FOE)


For inoperative ALS, increase S-31 Cats C/D/E visibility to 1 3/8 SM.	MALSR	MISSED APPROACH: Climbing left turn to 3000 heading 190° and on FOE TACAN R-213 to STANC/19 DME and hold.
---	-------	---

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER★ 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

NOT FOR CIVIL USE

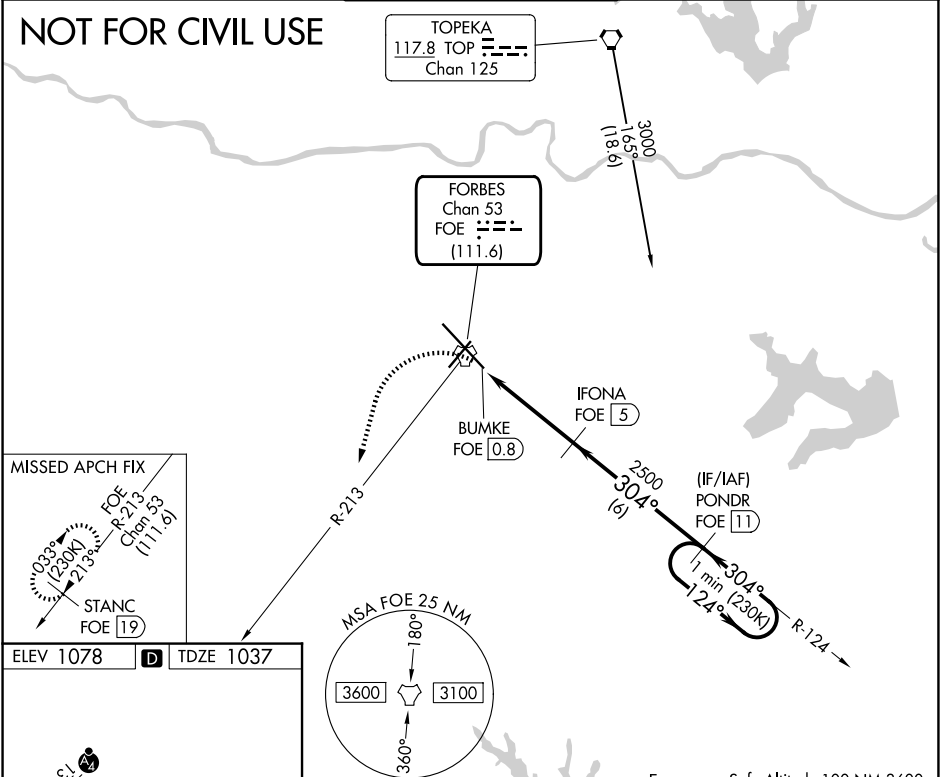

ELEV 1078	D	TDZE 1037
-----------	----------	-----------



Emergency Safe Altitude 100 NM 3600				
3000	hdg 190°	FOE R-213	STANC FOE 19	IFONA FOE 5
FOE TACAN	FOE BUMKE 0.8	FOE 2.1	3.15° TCH 58	2500
1.3	2.9 NM	6 NM	One Minute Holding Pattern	124° → 3000
CATEGORY	A	B	C	D
S-31	1500/24	463 (500-1/2)	1500/50	463 (500-1)
CIRCLING	1520-1 442 (500-1)	1580-1 502 (600-1)	1580-1 1/2 502 (600-1 1/2)	1700-2 622 (700-2)

REIL Rws 3, 13 and 21
MIRL Rwy 3-21
HIRL Rwy 13-31