

WAAS CH 86232 W13A	APP CRS 126°	Rwy Ldg TDZE 593 Apt Elev 595	5601
--	------------------------	---	-------------

RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)

RNP APCH-GPS.

⚠


Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.

MALS

MISSED APPROACH:

Climb to 3000 direct HODAL and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

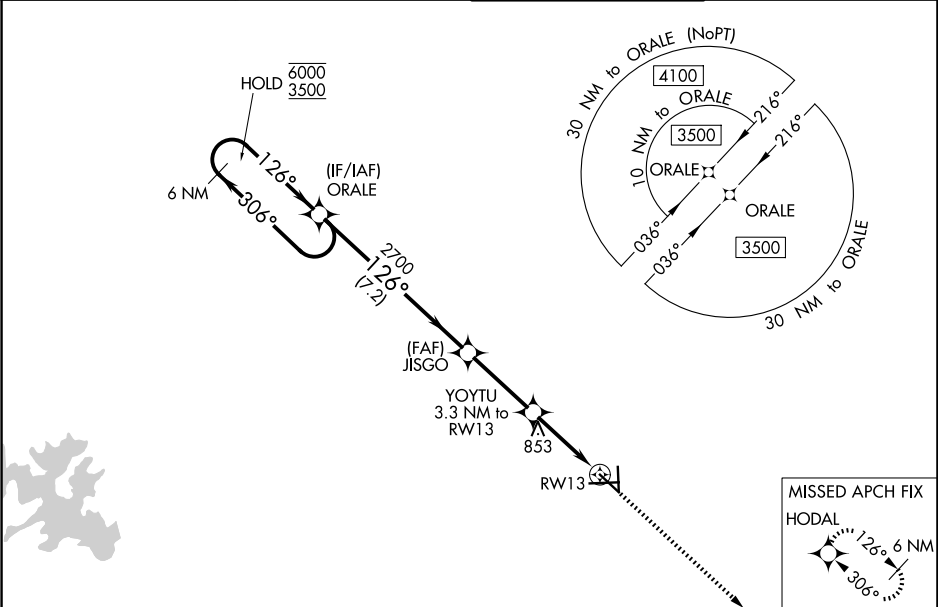

ELEV 595

TDZE 593

6 NM Holding Pattern

ORALE

JISGO

YOYTU

RW13

3000

HODAL

GP 3.00°

TCH 57

7.2 NM

3.1 NM

1.8 NM

1.5 NM

CATEGORY	A	B	C	D	E
LPV DA		793-¾	200 (200-¾)		
LNAV/VNAV DA		946-¾	353 (400-¾)		
LNAV MDA	1120-¾	527 (600-¾)	1120-1¼	527 (600-1¼)	
CIRCLING	1120-1	525 (600-1)	1240-1¾	1320-2¼	1340-2¾

521.4 X 100

26

35

5

0.4% UP

TWR

MIRL Rwy 8-26, 13-31, and 17-35