

LOC/DME I-JAC <u>109.1</u> Chan 28	APP CRS 187°	Rwy Ldg 6300 TDZE 6451 Apt Elev 6451
--	------------------------	---

ILS Y or LOC Y RWY 19
JACKSON HOLE (JAC)

RADAR required for procedure entry at MOSSS.

 Circling NA for Cats A, B and C east of Rwy 1-19. Circling NA for
 Cat D. For inop ALS, increase SOSUE fix minimums S-LOC 19 Cats
 -21°C C and D visibility to 2½ SM. For inop ALS, increase S-LOC Cat
C and D visibility to 3 SM.



MALS



MISSED APPROACH: Climb to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.

D-ATIS	SALT LAKE CENTER	JACKSON TOWER ★	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF) 0	124.55	122.95

MISSED APCH FIX

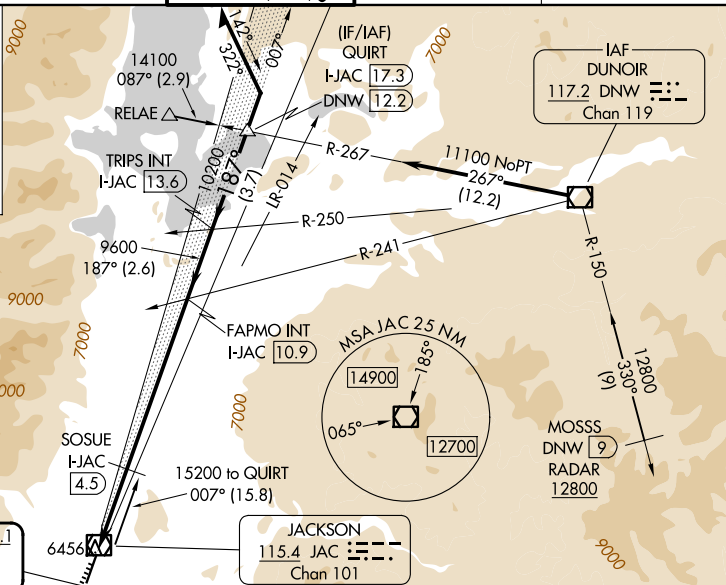

LOCALIZER 109.1
I-JAC : : :
Chan 28

Use I-JAC DME when on the localizer course.

0000-0001-9678-900X

Remain
within 10 NM

Segment	Distance (NM)	Altitude (ft)	Gradient (%)	Heading (°)
1	6.300	1500	0.6% Up	187°
2	0.8	7540	-	187°
3	2.6	9600	-	11100
4	3.7	13100	-	007°

Category	A	B	C	D
S-ILS 19	7077-1½	626 (700-1½)		
S-LOC 19	7540/55 1089 (1100-1)	7540-1¼ 1089 (1100-1¼)	7540-2½ 1089 (1100-2½)	
CIRCLING	7540-1¼ 1089 (1100-1¼)	7540-1½ 1089 (1100-1½)	7540-3 1089 (1100-3)	NA

SOSUE FIX MINIMUMS (DME REQUIRED)			
S-LOC 19	7300/40 849 (900-¾)	7300/55 849 (900-1)	7300-2 849 (900-2)
CIRCLING	7300-1¼ 849 (900-1¼)		

JACKSON HOLE (JAC)
ILS Y or LOC Y RWY 19