

CLOVIS, NEW MEXICO

RNAV (GPS) RWY 4

WAAS CH 41172 W04A	APCH CRS 038°	Rwy Idg 10,001 TDZE 4284 Arpt Elev 4295
--------------------------	------------------	---

(USAF)


CANNON AFB (KCVS)

T * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop increase RVR to 60 vis to 1 1/8 miles. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.	ALSF-1 	MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.
---	---	--

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8
---------------------	---------------------------------	-----------------------	------------------------

DME/DME RNP-0.3 NA

For uncompensated Baro-VNAV systems, Procedure NA below 7°C (45°F) or above 54°C (130°F).

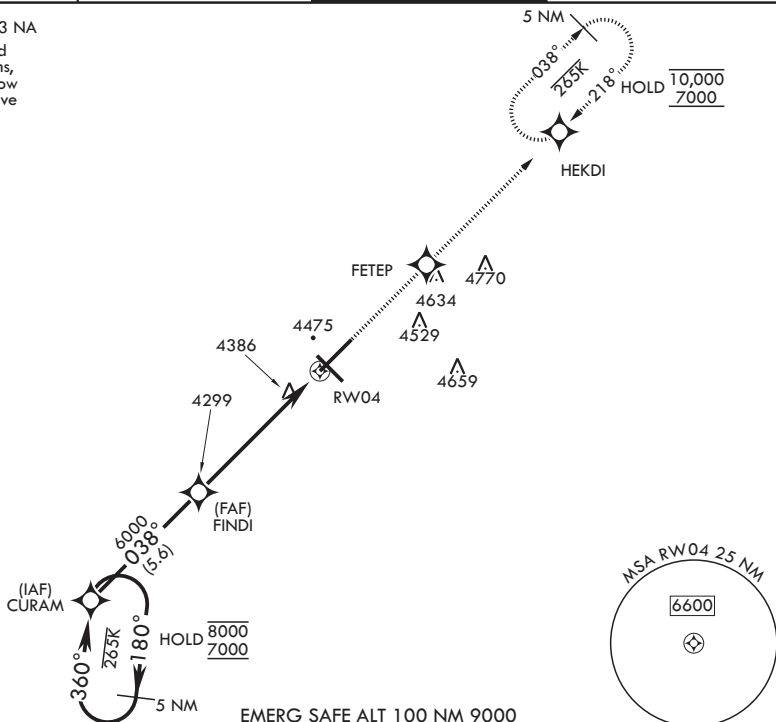

EMERG SAFE ALT 100 NM 9000

5 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI angle 2.50/TCH 41).




ELEV 4295

TDZE 4284

$$\begin{array}{r} 8000 \\ - 3000 \\ \hline \end{array}$$

GP 2.50°
TCH 46



CATEGORY	A	B	C	D	E
LPV DA*	4484/24		200	(200-½)	
LNAV/VNAV DA**	4700/40		416	(500-¾)	
LNAV MDA***	4700/24	416 (500-½)	4700/40	416	(500-¾)
CIRCLING	4840-1 545 (600-1)		4840-1½ 545 (600-1½)	4980-2¼ 685 (700-2¼)	5020-2½ 725 (800-2½)

HIRL all rwys

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

RNAV (GPS) RWY 4

Amdt 3 07OCT21

SW-1, 06 AUG 2026 to 03 SEP 2026

SW-1, 06 AUG 2026 to 03 SEP 2026