

LOC/DME I-LEI	APP CRS	Rwy Ldg	7500
108.5	234°	TDZE	435
Chan 22		Apt Elev	435

ILS or LOC RWY 23L

RALEIGH-DURHAM INTL (RDU)

RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry.
DME required for LOC only.



⚠

Simultaneous approach authorized. For inop ALS, increase S-ILS 23L all Cats visibility to RVR 5500. Localizer unusable for coupled approaches below 1100 or within 2 NM of threshold.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 on heading 050° and RDU VORTAC R-092 to ZEBUL INT and hold.

D-ATIS	RALEIGH APP CON	RALEIGH TOWER	GND CON	CINC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8	121.9 348.6	120.1	

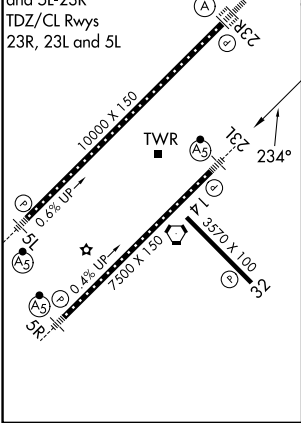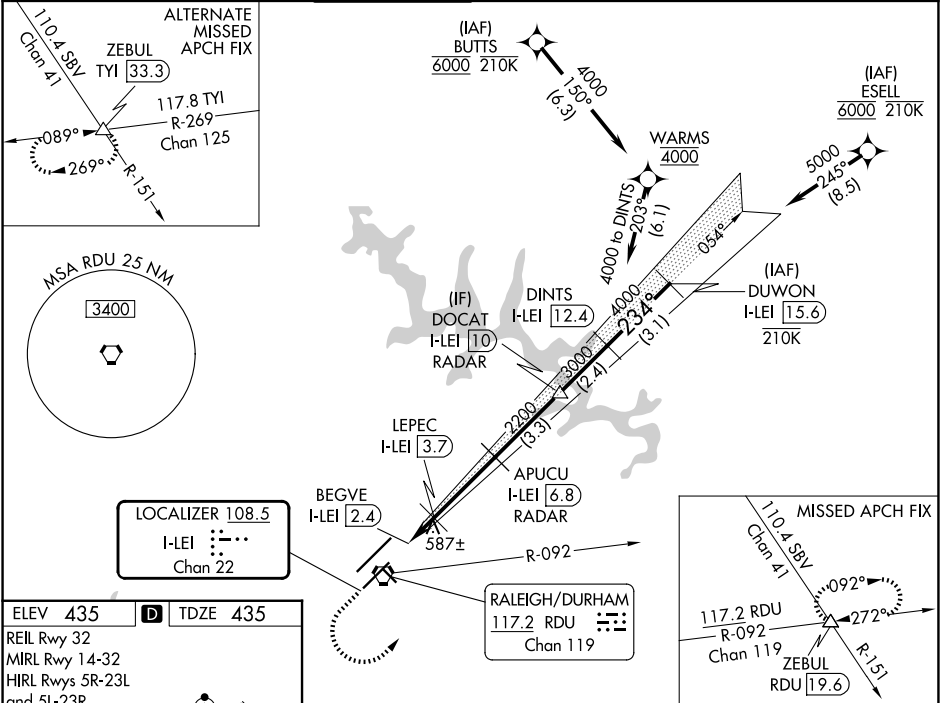

1100	2600	RDU R-092	ZEBUL	Localizer unusable from 1 NM from threshold.	DUWON
hdg 050°			△		I-LEI [15.6]
*LOC only.			APUCU I-LEI [6.8] RADAR		DINTS I-LEI [12.4]
			LEPEC I-LEI [3.7]		2200
			BEGVE I-LEI [2.4]		3000
					2200
					4000
					5000
					GS 3.00° TCH 56
1 NM	1.3 NM	3.1 NM	3.3 NM	2.4 NM	3.1 NM
CATEGORY	A	B	C	D	
S-ILS 23L	806/35	371 (400-¾)			
S-LOC 23L	840/40	405 (500-¾)			
CIRCLING	960-1¼	525 (600-1¼)	1020-1½ 585 (600-1½)	1180-2½ 745 (800-2½)	