


WAAS CH 40027 W28D	APP CRS 281°	Rwy Ldg TDZE Apt Elev	10102 1174 1203
--	------------------------	-----------------------------	--

RNAV (GPS) Y RWY 28R
PITTSBURGH INTL (PIT)

RNP APCH - GPS.			MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 direct EWC VOR/DME and hold.
 Circling Rwy 14 NA at night. Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 3/8 SM. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.			
D-ATIS 127.25	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6

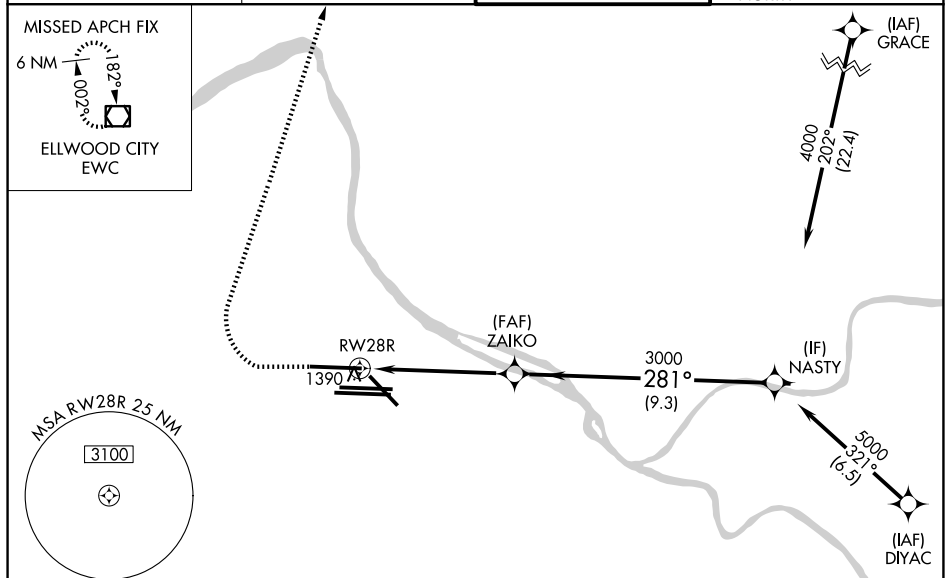

CATEGORY	A	B	C	D
LPV DA	1374/18	200 (200-½)		
RNAV/VNAV DA	1629/45	455 (500-¾)		
RNAV MDA	1640/24	466 (500-½)	1640/50	466 (500-1)
CIRCLING	1700-1	497 (500-1)	1880-2 677 (700-2)	1880-2¼ 677 (700-2¼)