

APP CRS	Rwy Ldg	9001
005°	TDZE	90
	Apt Elev	96

RNAV (RNP) Z RWY 35R

ORLANDO INTL (MCO)

RNP AR APCH - GPS. Authorization required. From CAVMN: RF.


T Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase RNP 0.13 all Cats visibility to RVR 4500.

ALSF-2





MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	GND CON 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	--	---

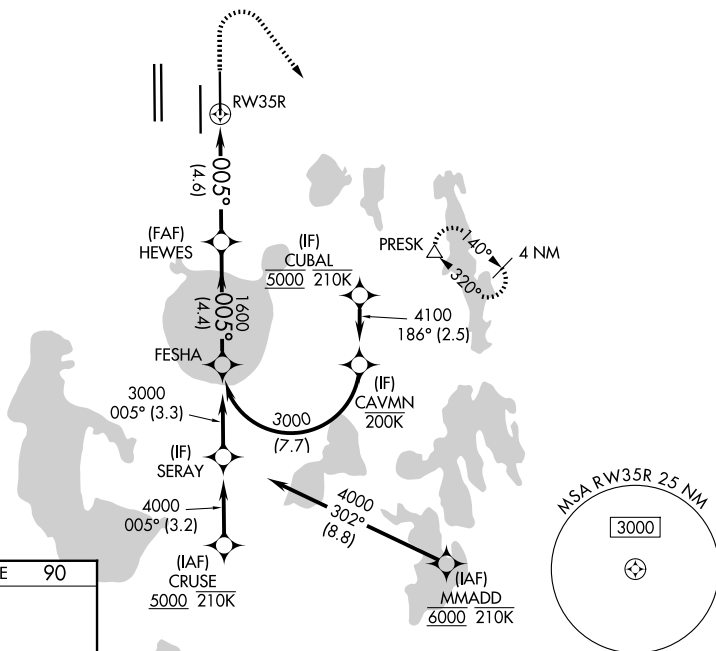

ELEV 96	D	TDZE 90
---------	----------	---------

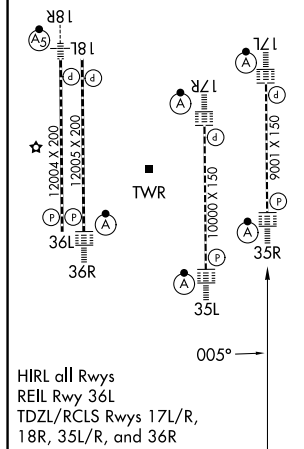

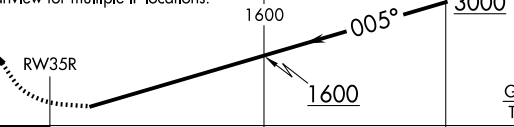500 ↑	3000 	PRESK △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 73).	
See planview for multiple IF locations.				
CATEGORY	A	B	C	D
RNP 0.13 DA	360/24 270 (300-½)			
RNP 0.30 DA	430/26 340 (400-½)			
AUTHORIZATION REQUIRED				