


WAAS CH 53704 W05A	APP CRS 046°	Rwy Ldg TDZE 572 Apt Elev 583
--	------------------------	---

RNAV (GPS) RWY 5


FREEMAN MUNI (SE.R)

RNP APCH - GPS.	ODALS	MISSED APPROACH: Climb to 2400 direct NAYIV and hold.
▼ NA Rwy 5 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats C/D visibility to 1½ SM.		

AWOS-3 119.425	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

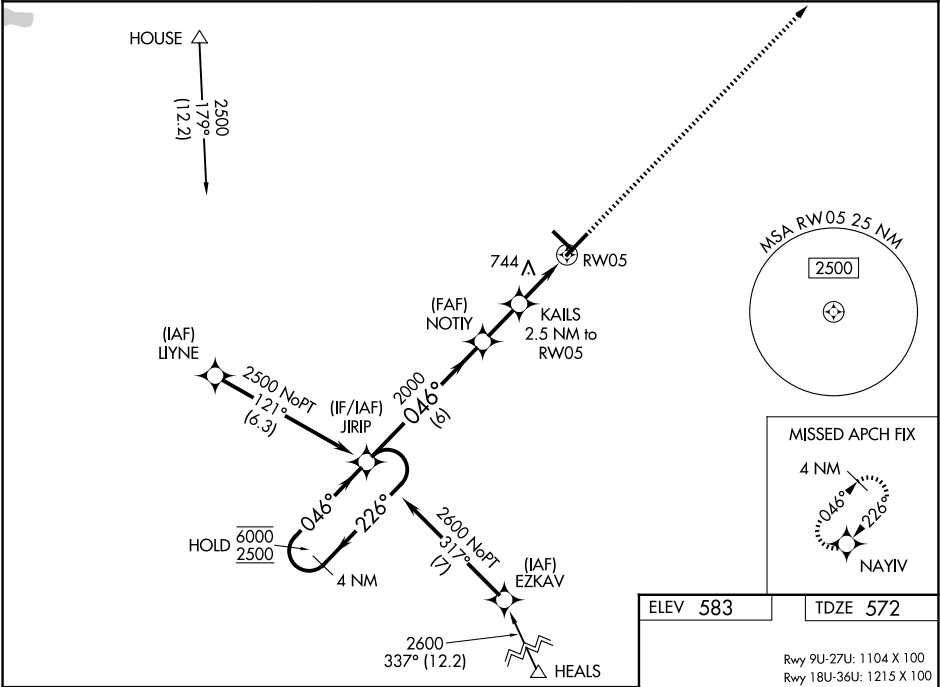

4 NM Holding Pattern				
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 33).				
6000 2500 GP 3.00° TCH 45 JIRIP NOTIV KAILS 2.5 NM to RW05 1.3 NM to RW05 RW05 226° 046° 046° 2000 1400 6 NM 1.9 NM 1.2 NM 1.3 NM				
CATEGORY	A	B	C	D
LPV DA	834-1		262 (300-1)	
LNAV/VNAV DA	1017-1½		445 (500-1½)	
LNAV MDA	1000-1	428 (500-1)	1000-1½	428 (500-1½)
CIRCLING	1080-1 497 (500-1)	1140-1 557 (600-1)	1240-1¾ 657 (700-1¾)	1240-2 657 (700-2)

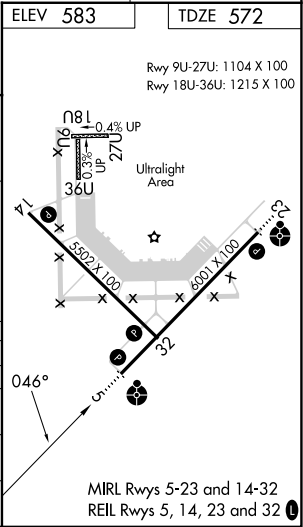

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026