


WAAS CH 73020 W17A	APP CRS 174°	Rwy Ldg TDZE Apt Elev	8600 470 470
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17L
TSTC WACO (CNW)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM. ASR	MALSR ⚠	MISSED APPROACH: Climb to 2300 direct OMOBE and hold.
---	------------	---

AWOS-3PT 134.225	WACO APP CON ★ 127.65 227.125	TSTC TOWER ★ 124.0 (CTAF) 255.7	GND CON 121.7 0	UNICOM 122.95
----------------------------	---	---	---------------------------	-------------------------

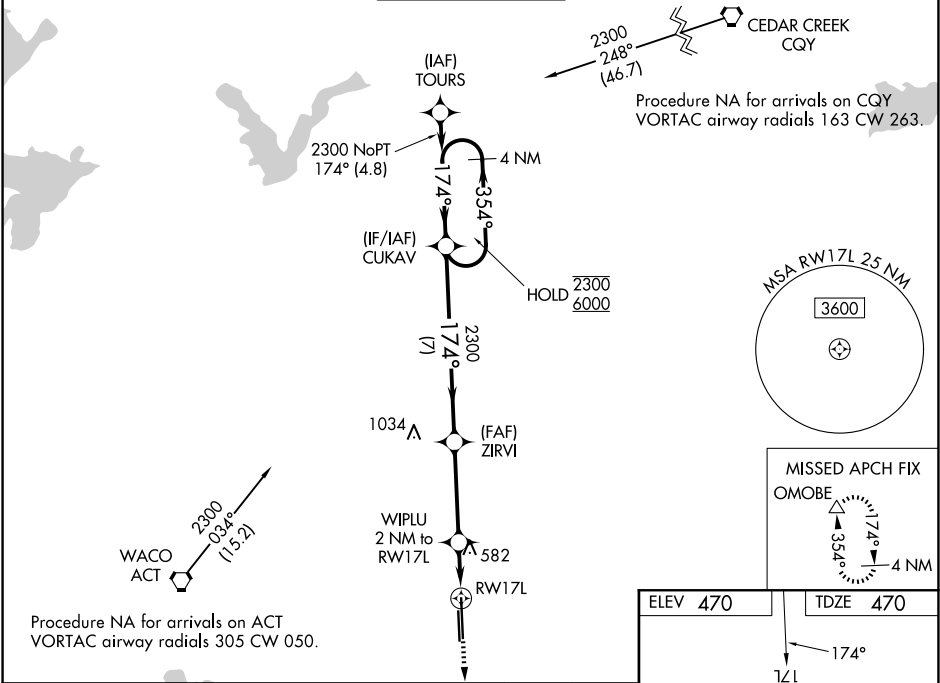

4 NM Holding Pattern		CUKAV		ZIRVI		2300	WIPLU 2 NM to RW17L		2300	OMOBE
6000 ← 354°		174° →		2300		*1140		*1 NM to RW17L		*LNAV only.
GP 3.00° TCH 52		7 NM		3.6 NM		1 NM		1 NM		
CATEGORY	A	B	C	D						
LPV DA	670-½		200 (200-½)							
LNAV/ VNAV DA	720-½		250 (300-½)							
LNAV MDA	840-½		370 (400-½)		840-⅝		370 (400-⅝)			
CIRCLING	940-1 470 (500-1)		1040-1 570 (600-1)		1040-1½ 570 (600-1½)		1120-2 650 (700-2)			

