

APP CRS	Rwy Ldg	8500
164°	TDZE	415
	Apt Elev	433

RNAV (RNP) Z RWY 16R
SEATTLE-TACOMA INTL (SEA)


▼ For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 16L, except for arrivals at PPAUL and VASHN. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5800, increase RNP 0.30 all Cats visibility to 1½ SM.

ALSF-2




MISSED APPROACH: Climb to 900 then climbing right direct ZERLI to cross ZERLI at 2000 and hold.

D-ATIS	SEATTLE APP CON	SEATTLE TOWER	GND CON
118.0	133.65 273.45	119.9 239.3 (16L, 16C, 34C, 34R) 120.95 239.3 (16R, 34L)	121.7

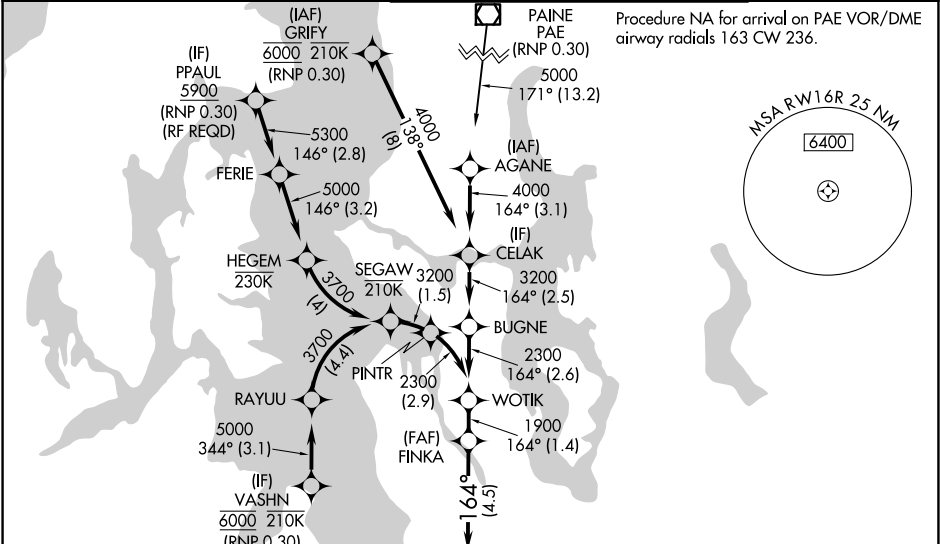

MISSED APCH FIX

ZERLI
2000



900




ZERLI
2000



VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

See planview for multiple IF locations.




CATEGORY	A	B	C	D
RNP 0.15 DA	770/34 355 (400-5%)			
RNP 0.30 DA	854/50 439 (500-1)			

AUTHORIZATION REQUIRED

RADAR REQUIRED

ELEV 433	D	TDZE 415
----------	---	----------

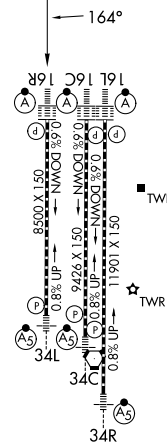

HIRL all rwys
TDZL/RCLS Rwy 16L, 16C, 16R and 34R

NW-1, 06 AUG 2026 to 03 SEP 2026

NW-1, 06 AUG 2026 to 03 SEP 2026