


WAAS CH 56210 W04A	APP CRS 041°	Rwy Ldg TDZE Apt Elev	7826 652 661
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
GENERAL DOWNING - PEORIA INTL (PIA)

RNP APCH.		MALSR		MISSED APPROACH: Climb to 2300 direct WEKAR and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP and Baro-VNAV NA with Logan County altimeter setting. When local altimeter setting not received, use Logan County altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C and D visibility 1/4 mile, and Circling Cat C 1/4 mile and Cat D 1/2 mile. For inoperative MALSR using Logan County altimeter setting, increase LPV all Cats visibility to 1 mile. For inop ALS, increase LNAV Cat C/D visibility to 1 SM. Circling Rwy 13, 31 NA at night.				
ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55

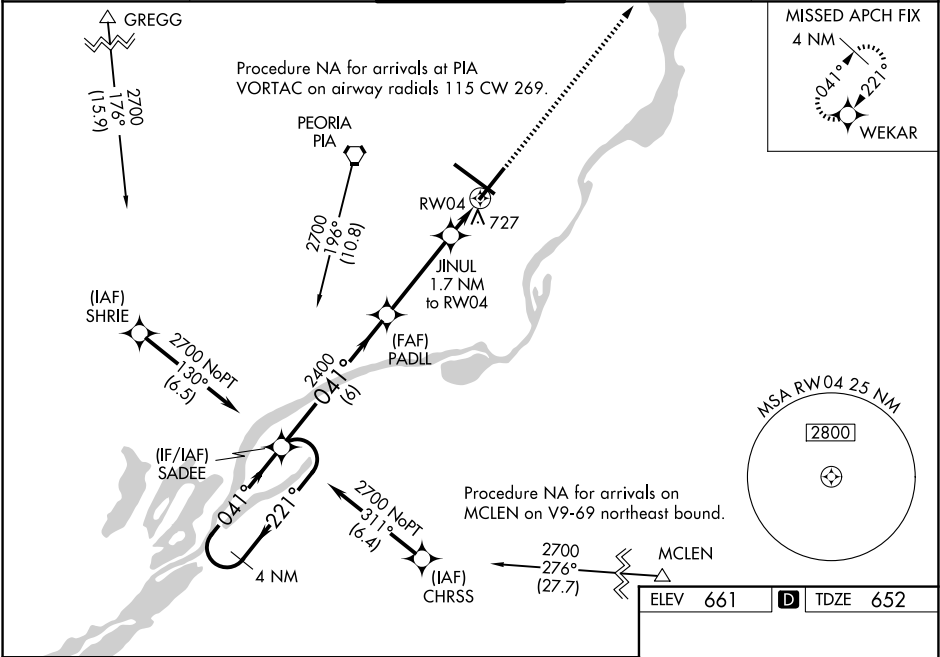

4 NM Holding Pattern				SADEE		PADLL		JINUL 1.7 NM to RW04		2300 ↑ WEKAR ✦	
2700 ← 221° 041° →				041°		2400		* 1220		* LNAV only	
GP 3.00° TCH 55				2400		* 0.9 NM to RW04		RW04			
				6 NM		3.7 NM		0.8		0.9	
CATEGORY		A		B		C		D			
LPV DA				857-½		205 (200-½)					
LNAV/VNAV DA				905-½		253 (300-½)					
LNAV MDA		1000-½		348 (400-½)		1000-⅝		348 (400-⅝)			
CIRCLING		1160-1		499 (500-1)		1180-1½ 519 (600-½)		1400-2¼ 739 (800-2¼)			

