
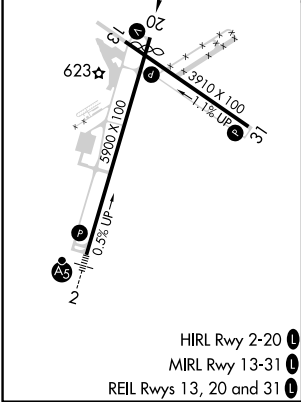


WAAS CH 87116 W20A	APP CRS 205°	Rwy Ldg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20
DANVILLE RGNL (DAN)

RNP APCH. Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cals visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.	MISSED APPROACH: Climb to 2500 direct LANTA and hold.
---	---

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

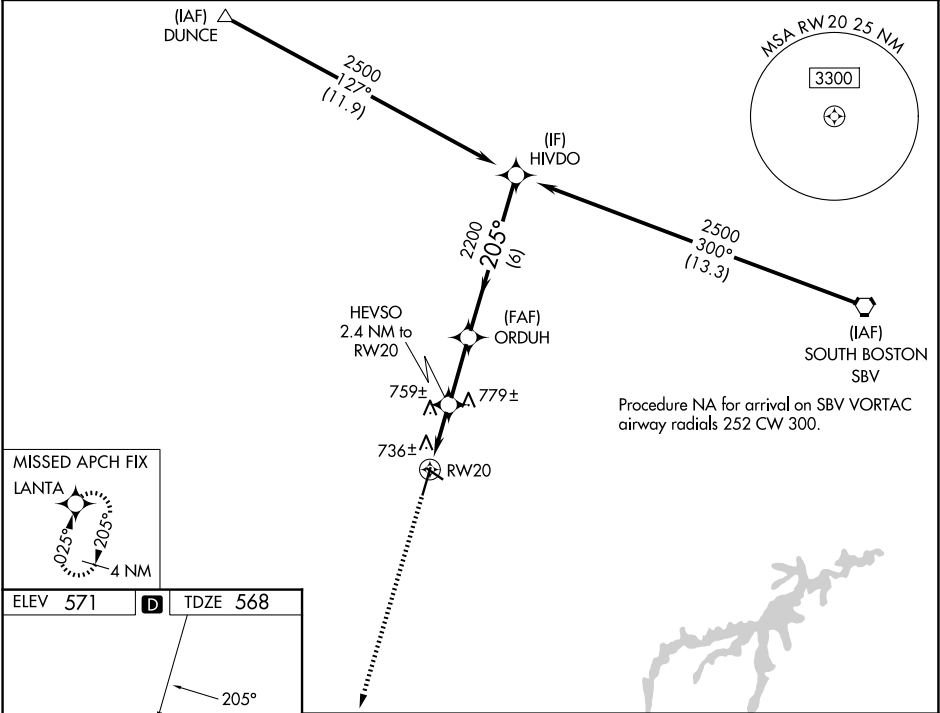

2500	LANTA	HEVSO 2.4 NM to RW20	ORDUH 2200	HIVDO 2500
*LNAV only.				
*1.3 NM to RW20				
1380*				
1.3 NM 1.1 NM 2.5 NM 6 NM				
CATEGORY	A	B	C	D
LPV	DA	768-1 200 (200-1)		
LNAV/VNAV	DA	1026-1½ 458 (500-1½)		
LNAV	MDA	1020-1 452 (500-1)	1020-1¼ 452 (500-1¼)	1020-1½ 452 (500-1½)