

WAAS CH 57907 W21A	APP CRS 214°	Rwy Ldg TDZE Apt Elev	6500 522 547
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21

BOWLING GREEN-WARREN COUNTY RGNL (BWG)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. Baro-VNAV and VDP NA when using GLW altimeter setting. Circling Rwy 30 NA at night.

Rwy 21 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use GLW altimeter setting and increase LPV DA to 884 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1150 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3100 direct WEDVO and hold.

ASOS 127.825	MEMPHIS CENTER 133.85 285.5	UNICOM 123.0 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

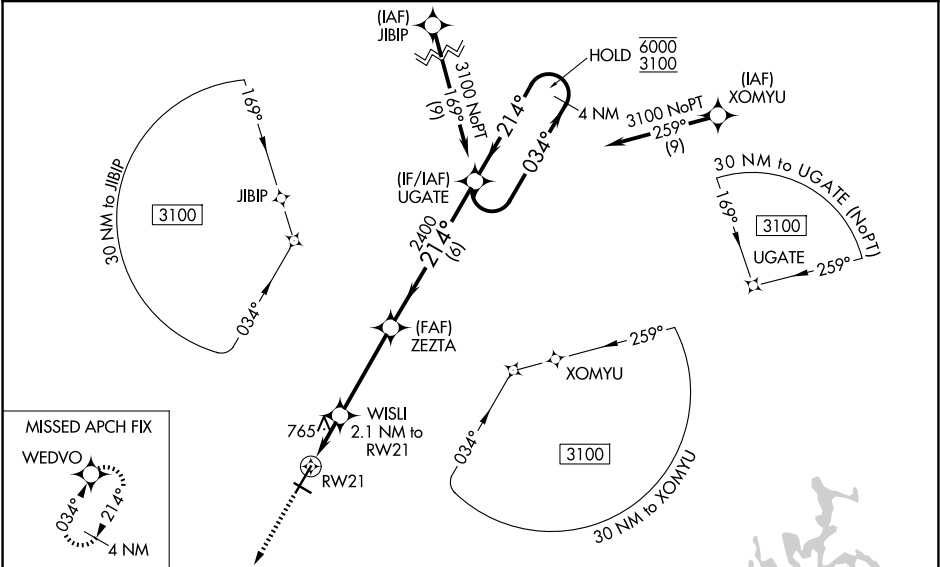

ELEV 547 **D** TDZE 522

REIL Rwy 3 and 21 **0**
MIRL Rwy 12-30
HIRL Rwy 3-21 **0**

3100	WEDVO	WISLI 2.1 NM to RW21	ZEZZA 2400	UGATE 2400	4 NM Holding Pattern
1.4 NM	0.7 NM	3.6 NM	6 NM		
1240	2400	6000	3100		GP 3.00° TCH 55'
3100	WEDVO	WISLI 2.1 NM to RW21	ZEZZA 2400	UGATE 2400	4 NM Holding Pattern
1.4 NM	0.7 NM	3.6 NM	6 NM		
1240	2400	6000	3100		GP 3.00° TCH 55'
CATEGORY	A	B	C	D	
LPV DA	807-7/8	285 (300-7/8)			
LNAV/VNAV DA	1073-15/8	551 (600-15/8)			
LNAV MDA	1020-1 498 (500-1)	1020-13/8 498 (500-13/8)			
CIRCLING	1020-1 473 (500-1)	1120-1 573 (600-1)	1160-13/4 613 (700-13/4)	1200-2 653 (700-2)	