

LOC I-HUF <u>109.7</u>	APP CRS 049°	Rwy Ldg TDZE Apt Elev	9020 573 589
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 5
TERRE HAUTE RGNL (HUF)


ADF or DME required.

⚠ VDP NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase S-LOC 5 Cats C/D visibility to RVR 4500. For inop ALS, increase S-LOC 5 Cat C/D visibility to RVR 5500, when using Paris altimeter setting increase S-LS 5 all Cats visibilities to RVR 4500 and S-LOC Rwy 5 all Cats visibility ½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Paris altimeter setting.

MALSR

MISSED APPROACH:
Climb to 2300 direct
TTH VORTAC and hold.

ATIS	HULMAN APP CON	HULMAN TOWER	GND CON
127.5 269.375	125.45 339.8	134.725 322.475	121.6 348.6

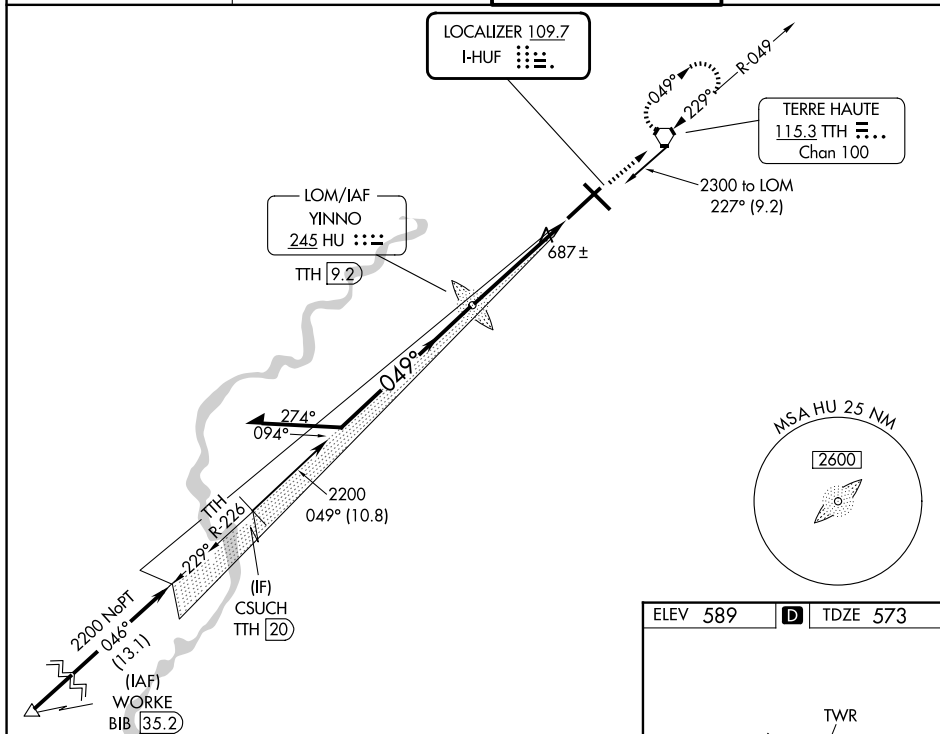

Remain within 10 NM

YINNO LOM
TTH 9.2

2300

229°

2125

049°

2200

GS 3.00°
TCH 40

* TTH 5.5

* LOC only.

2300 ↑	TTH ⬠
-----------	----------

			3.7 NM	1 NM	
CATEGORY	A	B	C	D	
S-ILS 5 **	773/24		200 (200-½)		
S-LOC 5	940/24	367 (400-½)	940/35	367 (400-¾)	
CIRCLING	1040-1 451 (500-1)	1040-1 451 (500-1)	1220-1¾ 631 (700-1¾)	1220-2 631 (700-2)	

FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34