RNAV (GPS) Z RWY 13L
JOHN F KENNEDY INTL (JFK)

APP CRS	Rwy Ldg	9093
134°	TDZE	13
	Apt Elev	13

RNP APCH - GPS.
RADAR required.
For any lead-in light bank out of service, increase visibility to 4 SM.

ALSF-2

MISSED APPROACH: (Do not exceed 210K until DVETO) Climb to 4000 on the extended visual approach track to RW13L, then direct DVETO and track 073° to HIRBO and hold.

D-ATIS (SW)	D-ATIS (NE)		NEW YORK APP CON	KENNEDY TOWER		GND CON
115.4	117.7	128.725	128.125 269.0	119.1 281.55 (4R/22L and 13L/31R)		121.9 348.6
				123.9 281.55 (4L/22R and 13R/31L)		

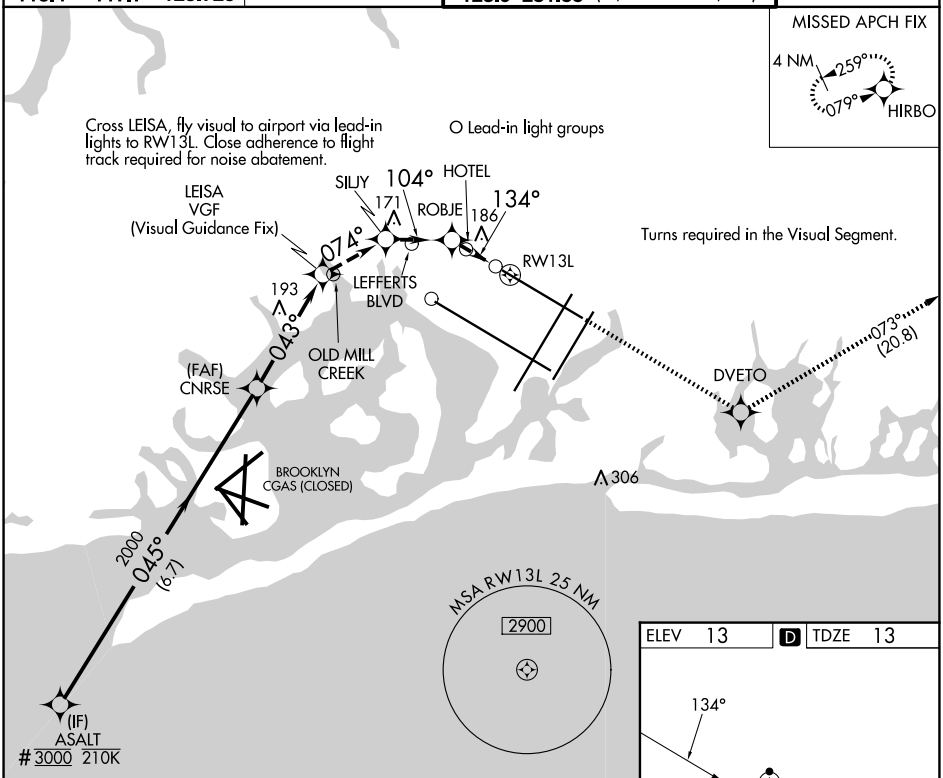

NE-2, 06 AUG 2026 to 03 SEP 2026

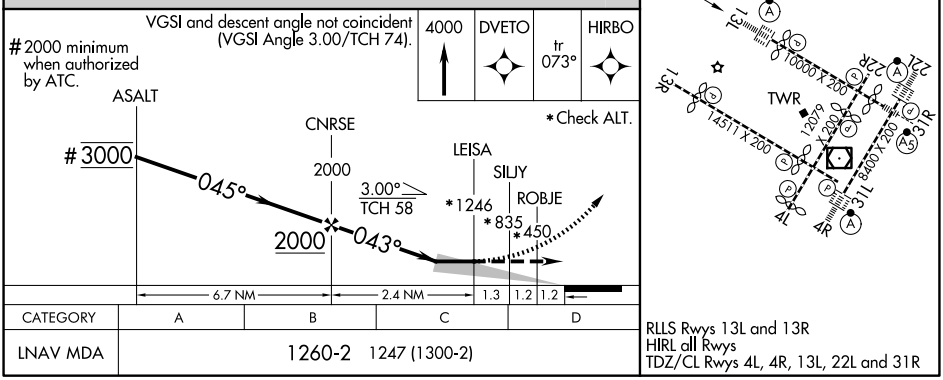

CATEGORY	A	B	C	D
LNAV MDA	1260-2 1247 (1300-2)			