

LOM IA	APP CRS	Rwy Ldg	9129
329	280°	TDZE	588
		Apt Elev	592

NDB RWY 28
NIAGARA FALLS INTL (IAG)


▼ Circling Rwy 6 NA at night.
▲ Rwy 28 helicopter visibility reduction below RVR 4000 NA.
Circling NA for Cat E southeast of Rwy 6-24.
For inop ALS, increase visibility Cats A/B to RVR to 5500, Cats C/D/E to 1¾ SM.

MALSR

AS

MISSED APPROACH: Climb to 1600 on heading 294° then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
---------------------	--------------------------------	---	------------------------	------------------

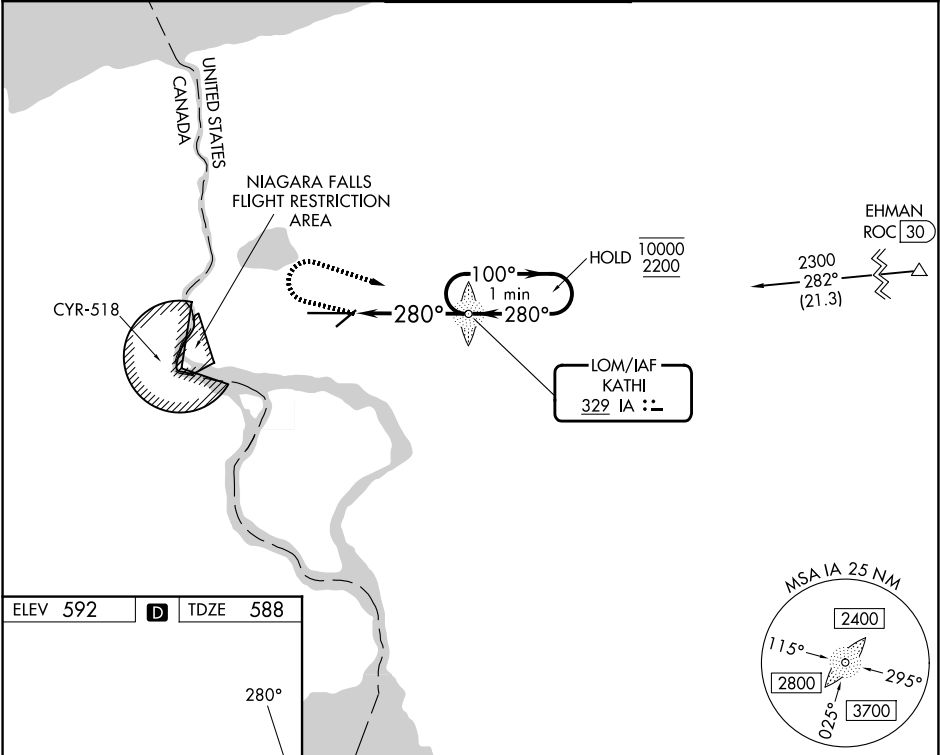

ELEV 592	D	TDZE 588
REIL Rwy 6 and 24 TDZL/RCLS Rwy 28 RCLS Rwy 10 HIRL Rwy 10-28 MIRL Rwy 6-24		
FAF to MAP 4.1 NM		
Knots	60	90 120 150 180
Min:Sec	4:06	2:44 2:03 1:38 1:22
CATEGORY	A	B C D E
S-28	1200/40	612 (700-¾) 1200-1 ¾ 612 (700-1 ¾)
CIRCLING	1200-1	608 (700-1) 1280-2 688 (700-2) 1280-2 ¼ 688 (700-2 ¼) 1280-2 ½ 688 (700-2 ½)