


LOC I-FFV	APP CRS	Rwy Ldg
111.3	139°	7540
		TDZE
		23
		Apt Elev
		30

ILS or LOC RWY 14


SARASOTA/BRADENTON INTL (SRQ)

DME or RADAR required for LOC only.	MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 on SRQ VOR/DME R-118 to MURDO INT/SRQ 13.6 DME and hold.
When control tower closed, S-ILS 14 Minimums NA; increase S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats visibility to 1 mile. When control tower closed, inop table does not apply to S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats.		

ATIS	TAMPA APP CON	SARASOTA TOWER★	GND CON	UNICOM
124.375	119.65 353.575	120.1(CTAF) 256.8	121.9 273.6	122.95

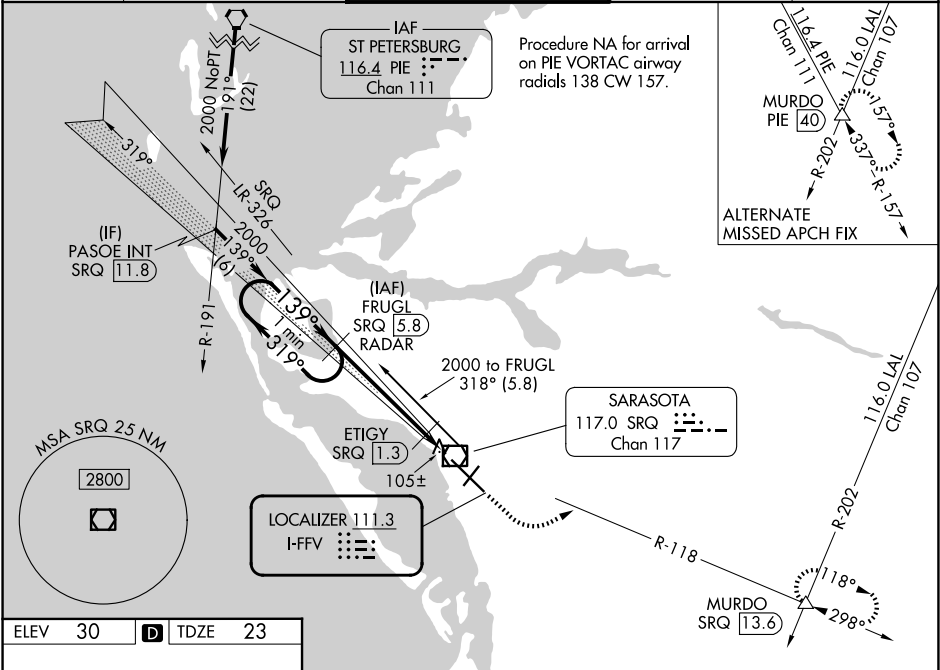

ELEV	30	TDZE	23
------	----	------	----



REIL Rwy 22						1
HIRL Rwy 14-32 and 4-22						1
FAF to MAP 6 NM						
Knots	60	90	120	150	180	
Min:Sec	6:00	4:00	3:00	2:24	2:00	

One Minute Holding Pattern	FRUGL SRQ 5.8 RADAR	1000	2000	MURDO
		↑	SRQ R-118	△
				*LOC only.
2000	319°	139°	139°	ETIGY SRQ 1.3
GS 3.00°	TCH 54			*500
		4.5 NM	1.5 NM	
CATEGORY	A	B	C	D
S-ILS 14		223-1/2	200 (200-1/2)	
S-LOC 14	500-1/2	477 (500-1/2)	500-1	477 (500-1)
CIRCLING	500-1	470 (500-1)	600-1 1/2	600-2
			570 (600-1/2)	570 (600-2)
			ETIGY FIX MINIMUMS	
S-LOC 14		360-1/2	337 (400-1/2)	
CIRCLING	500-1	470 (500-1)	600-1 1/2	600-2
			570 (600-1/2)	570 (600-2)