
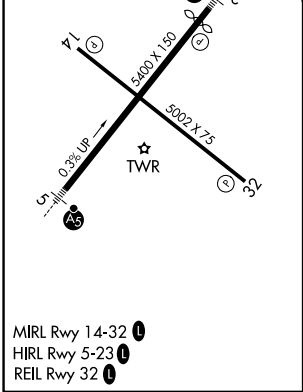


WAAS CH 65638 W23A	APP CRS 235°	Rwy Ldg TDZE 78 Apt Elev 79	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 23

NEW BEDFORD RGNL (E W B)

RNP APCH - GPS.			 MALSR	MISSED APPROACH: Climb to 2100 direct BONNI and hold.
 	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA. Circling Rwy 14 NA at night. For inop ALS, increase LPV all Cats visibility to ⅞ mile, increase LNAV/VNAV all Cats and LNAV Cats A/B visibility to 1 SM.			
ATIS 126.85	PROVIDENCE APP CON★ 128.7 269.525	NEW BEDFORD TOWER★ 118.1 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95

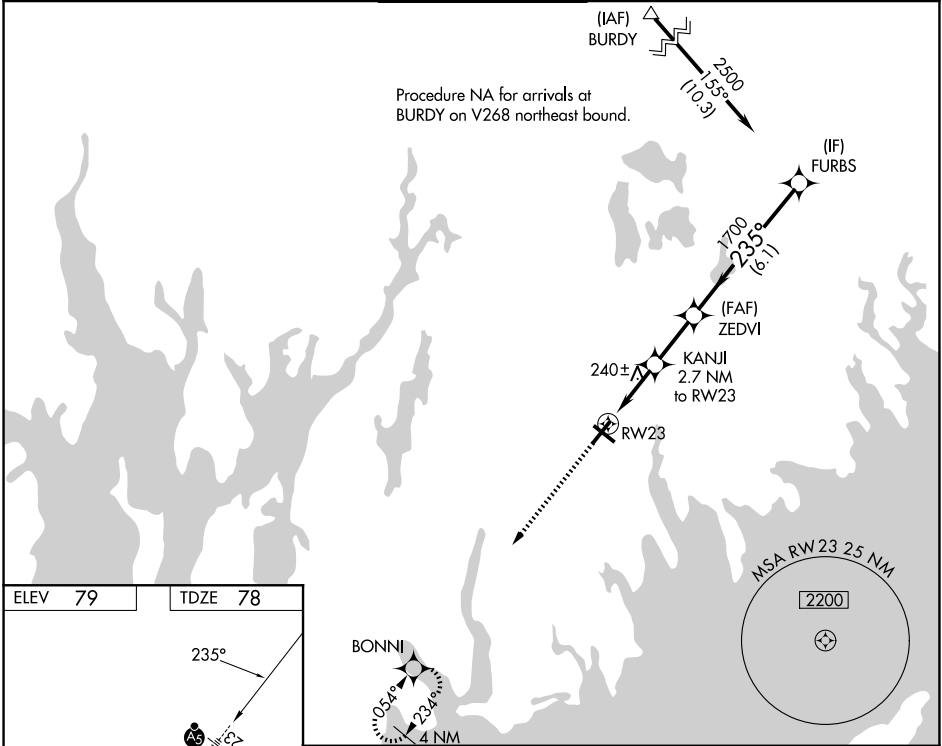

2100		BONNI	KANJI 2.7 NM to RW23		ZEDVI 1700	FURBS	2500
1.2 NM to RW23		1.2 NM		2.3 NM		6.1 NM	
RW23		980		1700		GP 3.00° TCH 46	
CATEGORY		A		B		C	
LPV DA		359-¾		281 (300-¾)			
LNAV/VNAV DA		453-¾		375 (400-¾)			
LNAV MDA		500-¾		422 (500-¾)			
CIRCLING		620-1 541 (600-1)		640-1 561 (600-1)		720-1¾ 641 (700-1¾)	
						960-3 881 (900-3)	