


WAAS CH 60938 W05A	APP CRS 054°	Rwy Ldg TDZE 70 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 5

NEW BEDFORD RGNL (EWB)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Circling Rwy 14 NA at night. For inop ALS, increase LNAV/ VNAV all Cts and LNAV Cat C/D visibility to 1½ SM.		MALS R A5	MISSED APPROACH: (Do not exceed 235K until BONNI) climb to 700 then climbing left turn to 2100 direct BONNI and hold.	
ATIS 126.85	PROVIDENCE APP CON★ 128.7 269.525	NEW BEDFORD TOWER★ 118.1 (CTAF) 239.0	GND CON 121.9	UNICOM 122.95

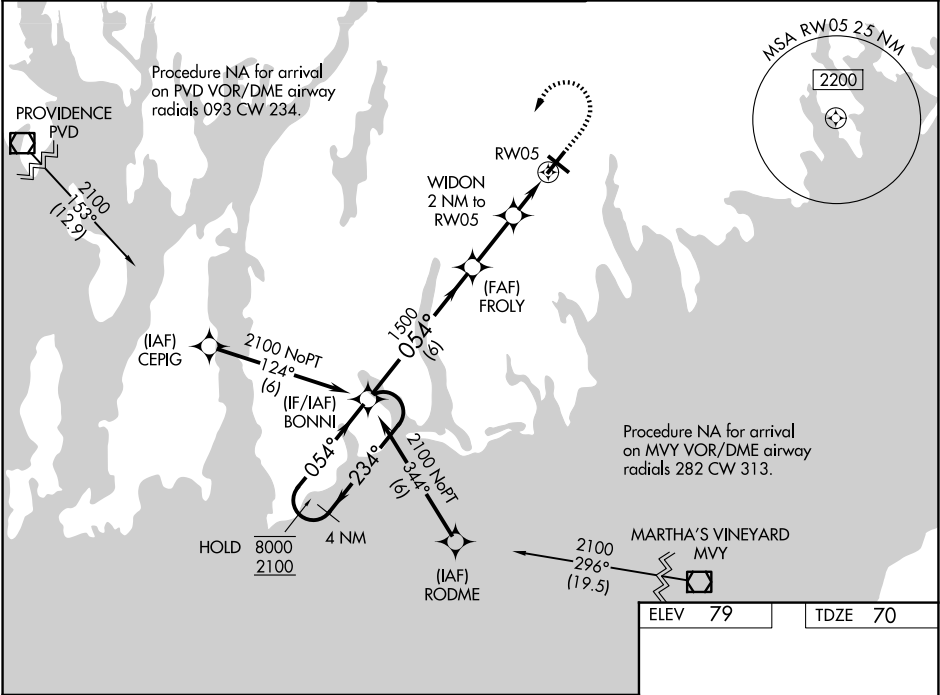

4 NM Holding Pattern		700 2100 BONNI	
BONNI		FROLY	
8000 2100		1500	
GP 3.00° TCH 49		740	
←234° 054°→		1.3 NM to RW05	
6 NM		2.4 NM	
CATEGORY		A B C D	
LPV DA		285/24 215 (300-½)	
LNAV/VNAV DA		540/50 470 (500-1)	
LNAV MDA		540/24 470 (500-½) 540/50 470 (500-1)	
CIRCLING		620-1 541 (600-1) 640-1 561 (600-1) 720-1¾ 641 (700-1¾) 960-3 881 (900-3)	

ELEV 79 TDZE 70

0.3% Up

500 X 150

500 X 75

TWR

054°

MIRL Rwy 14-32 1
HIRL Rwy 5-23 1
REIL Rwy 32 1