


APP CRS	Rwy Ldg	11640
096°	TDZE	883
	Apt Elev	896

RNAV (RNP) Z RWY 9

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From FLOTT or IDULE: RF.	MALSR	MISSED APPROACH: Climb to 3000 direct BLOCK and on track 138° to CALIF and hold.
For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C.		

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
-------------------	--	--	------------------

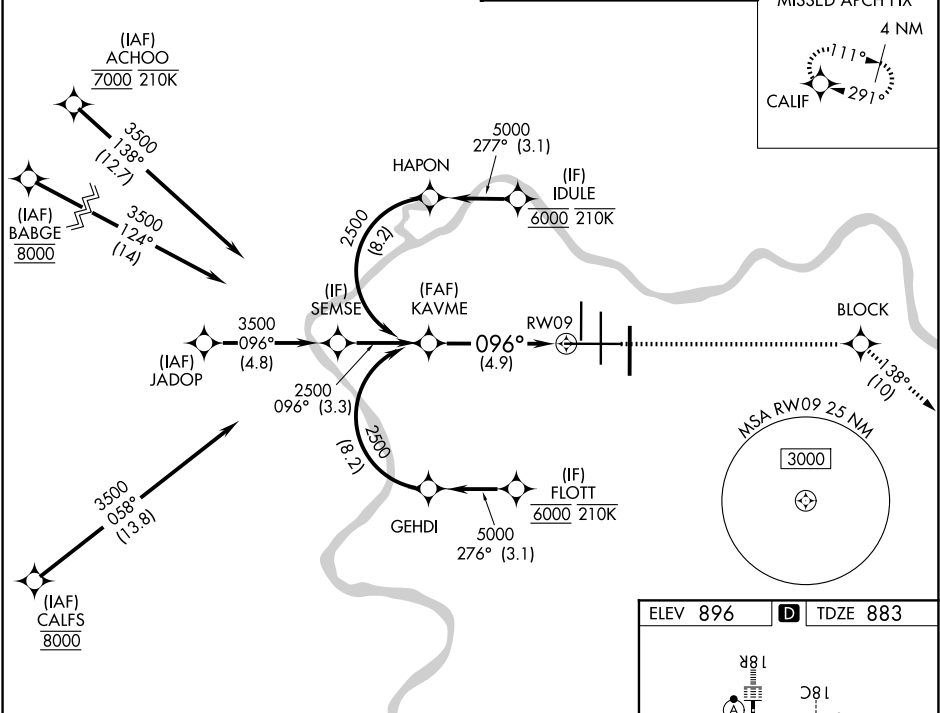

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).				
KAYME 2500				
GP 3.00° TCH 52				
See planview for multiple IF locations.				
4.9 NM				
CATEGORY	A	B	C	D
RNP 0.18 DA		1205/26	322 (400-½)	
RNP 0.30 DA		1275/35	392 (400-¾)	
AUTHORIZATION REQUIRED				

