


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>70639</b><br><b>W31A</b> | APP CRS<br><b>310°</b> | Rwy Ldg <b>5596</b><br>TDZE <b>974</b><br>Apt Elev <b>974</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 31


MINERAL WELLS RGNL (MWL)

|                                                                                                                 |                                                                                       |
|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                       | MISSED APPROACH: Climb to 1600 then climbing left turn to 4000 direct HEAST and hold. |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. Circling Rwys 17, 35 NA at night. |                                                                                       |

|                        |                                         |                                   |
|------------------------|-----------------------------------------|-----------------------------------|
| ASOS<br><b>135.075</b> | FORT WORTH CENTER<br><b>127.0 360.6</b> | UNICOM<br><b>122.725 (CTAF) 0</b> |
|------------------------|-----------------------------------------|-----------------------------------|

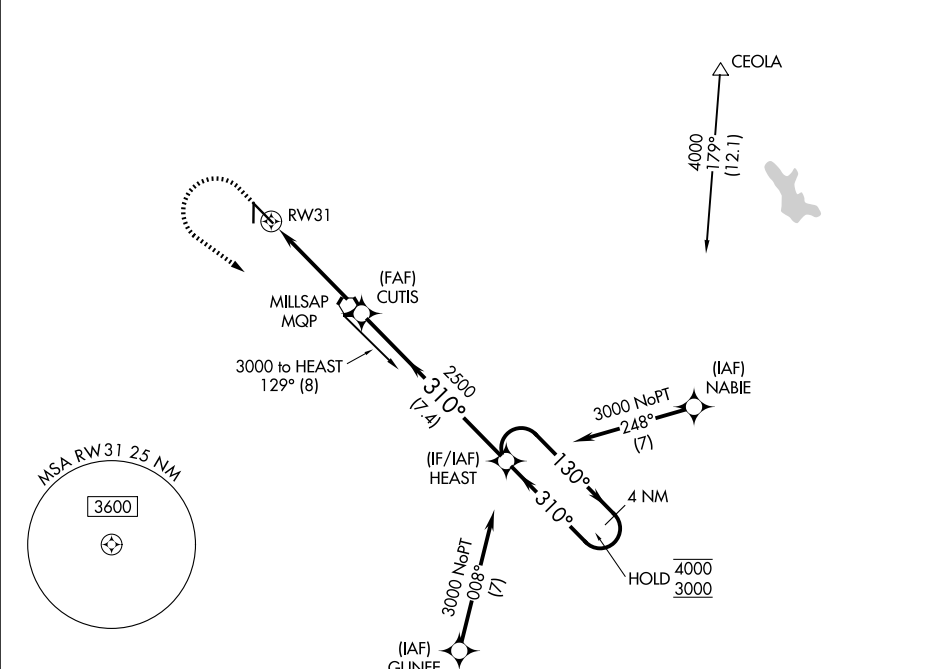

|                 |                 |
|-----------------|-----------------|
| ELEV <b>974</b> | TDZE <b>974</b> |
|-----------------|-----------------|

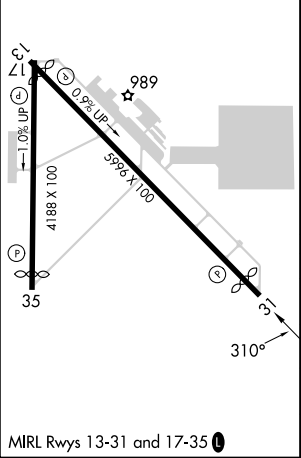

|              |                            |                       |                         |                         |
|--------------|----------------------------|-----------------------|-------------------------|-------------------------|
|              | 1600                       | 4000                  | HEAST                   |                         |
|              | ↑                          | ↶                     | ✧                       |                         |
|              | * LNAV only.               |                       |                         |                         |
|              | * 1 NM to RW31             |                       |                         |                         |
|              | CUTIS 2500                 |                       |                         |                         |
|              | HEAST 4 NM Holding Pattern |                       |                         |                         |
|              | 130° → 4000                |                       |                         |                         |
|              | ← 310° 3000                |                       |                         |                         |
|              | GP 3.00°                   |                       |                         |                         |
|              | TCH 53                     |                       |                         |                         |
|              | 1 NM 3.6 NM 7.4 NM         |                       |                         |                         |
| CATEGORY     | A                          | B                     | C                       | D                       |
| LPV DA       | 1174-¾ 200 (200-¾)         |                       |                         |                         |
| LNAV/VNAV DA | 1224-¾ 250 (300-¾)         |                       |                         |                         |
| LNAV MDA     | 1340-1 366 (400-1)         |                       |                         |                         |
| CIRCLING     | 1420-1<br>446 (500-1)      | 1460-1<br>486 (500-1) | 1740-2¼<br>766 (800-2¼) | 1740-2½<br>766 (800-2½) |